New Deck Code Quiz (12 hrs)

Instructions

1. Print these pages. **Fee $100**
2. Answer the **Simple questions** that follow the mini sections of the code language.
3. Circle the correct answers and transfer the answers to the answer sheets (see last pages).
4. After answering the simple questions you will become familiar with the new code changes.
5. Page down to the last page for the verification form, answer sheets and mailing instructions.

12 hour course for: **Course #17660**

1. Dwelling Contractor Qualifier Certification.
2. UDC Construction Inspector.

Live Support at 920-381-6714 or email tmklinka@hotmail.com

SPS 321.225 Decks. Decks attached to dwellings and detached decks which serve an exit shall comply with the applicable provisions of this chapter, including but not limited to:

(1) Excavation requirements of s. SPS 321.14
(2) Footing requirements of s. SPS 321.15 (2) (f)
(3) Frost penetration requirements of s. SPS 321.16
(4) Load requirements of s. SPS 321.02
(5) Stair, handrail and guardrail requirements of s. SPS 321.04
(6) Decay protection requirements of s. SPS 321.10

1. Handrails for decks must comply with SPS_____.
   a. 321.02
   b. 321.04
   c. 321.10
2. Decay protection for treated lumber must comply with SPS_____.
   a. 321.02
   b. 321.04
   c. 321.10
3. Load of deck floors must comply with SPS_____.
   a. 321.02
   b. 321.04
   c. 321.10
4. Pier depth below the frost line must comply with SPS_____.
   a. 321.14
   b. 321.15(2)(f)
   c. 321.16
5. Size of footing must comply with SPS_____.
   a. 321.14
   b. 321.15(2)(f)
   c. 321.16
6. Site excavation must comply with SPS_____.
   a. 321.14
   b. 321.15(2)(f)
   c. 321.16

New amendments to the deck code

SPS 321.225 Decks. (1) Decks attached to dwellings and any detached decks which serves deck that serves an exit shall comply with the applicable provisions of this chapter subchs. II to X, including but not limited to all of the following:

SECTION 2. SPS 321.225 (2) is created to read:

SPS 321.225 (2) A deck that complies with the standards in Appendix B, and Appendix C if applicable, shall be considered as complying with sub. (1).

SECTION 3. SPS 321.24 (3) (d) 8. and (Note) are created to read:

SPS 321.24 (3) (d) 8. Along the bottom of door openings that are elevated above-grade.
Note: Flashing placed along the bottom of a door opening that is elevated above-grade can subsequently accommodate adding a deck outside the door.

7. A deck that complies with the standards in Appendix ____, and Appendix C if applicable, shall be considered as complying with sub. (1).
   a. A
   b. B
   c. C
   d. all of the above
8. A deck that complies with the standards in Appendix B, and Appendix C_____, shall be considered as complying with sub. (1).
   a. is required
   b. is mandatory
   c. if applicable
   d. none of the above
9. Flashing placed along the bottom of a door opening that is elevated _____-grade can subsequently accommodate adding a deck outside the door.
   a. at
   b. below
   c. above
   d. none of the above
10. Sections 2 and 3 above were _____ to read.
   a. amended
   b. revised
   c. created
   d. deleted

Chapters SPS 320 – 325 Appendix B
Prescriptive Deck Standards

CONTENTS

Section		Page
1	GENERAL REQUIREMENTS	1
2	FOOTINGS, AND POST CONNECTIONS	2
3	POSTS AND POST-TO-BEAM CONNECTIONS	4
4	BEAMS	4
5	JOISTS	6
6	JOIST-TO-BEAM CONNECTIONS	8
7	JOIST HANGERS	8
8	LEDGER ATTACHMENTS	9
9	LEDGER-BOARD FASTENERS	11
10	FREE-STANDING DECKS	13
11	LATERAL SUPPORT	13
12	DECKING	16
13	GUARDRAILS AND POSTS	16
14	STAIRS	18
15	FRAMING PLAN	21

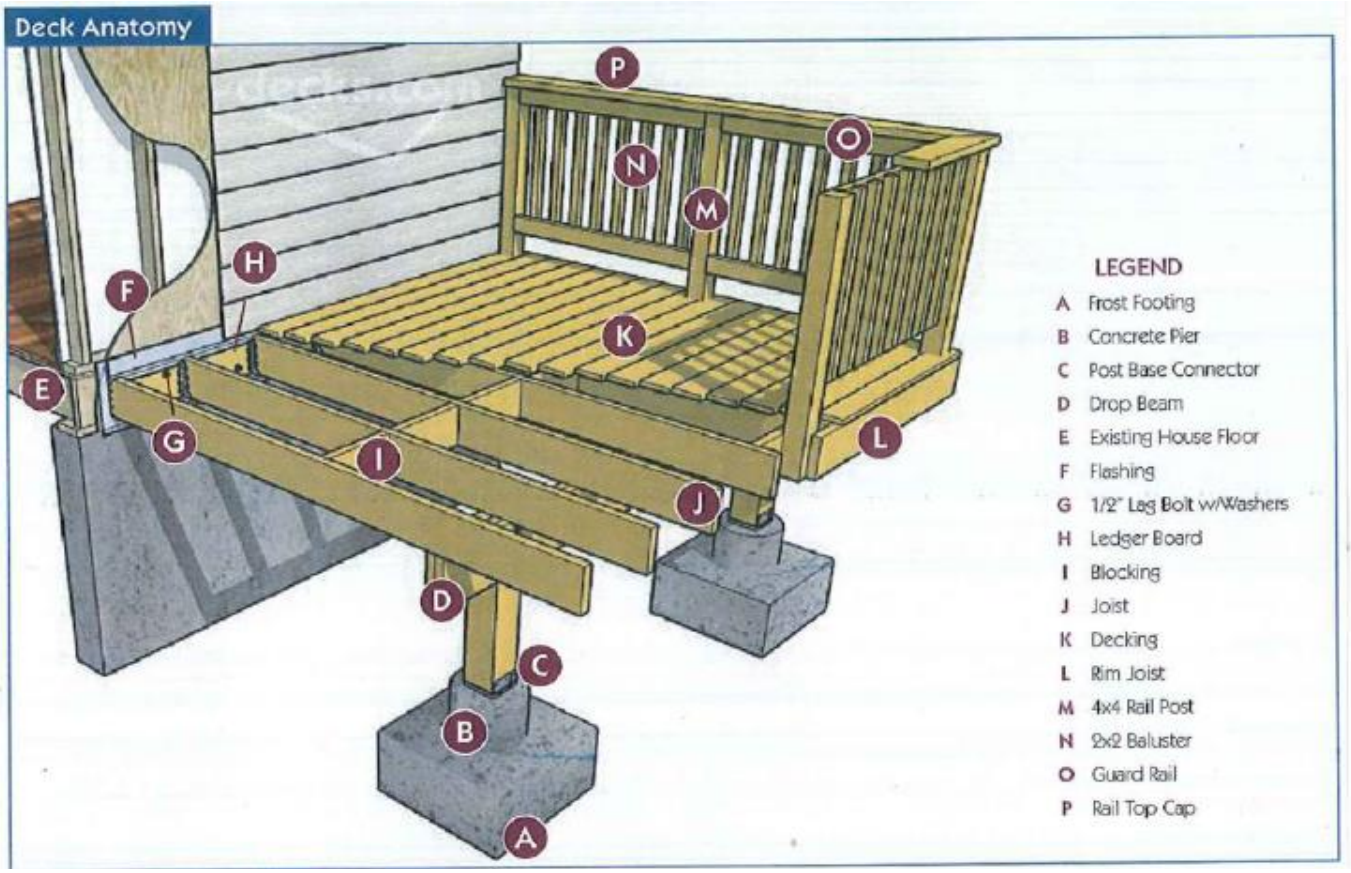

11. Referencing the deck diagram above the letter M represents _____.
    a. 4x4 rail post
    b. 2x2 baluster
    c. guard rail
    d. rail top cap
12. Referencing the deck diagram above the letter N represents _____.
    a. 4x4 rail post
    b. 2x2 baluster

c. guard rail
d. rail top cap

13. Referencing the deck diagram above the letter O represents _____.
    a. 4x4 rail post
    b. 2x2 baluster
    c. guard rail
    d. rail top cap
14. Referencing the deck diagram above the letter P represents _____.
    a. 4x4 rail post
    b. 2x2 baluster
    c. guard rail
    d. rail top cap
15. Referencing the deck diagram above the letter I represents _____.
    a. blocking
    b. joist
    c. decking
    d. rim joist
16. Referencing the deck diagram above the letter J represents _____.
    a. blocking
    b. joist
    c. decking
    d. rim joist
17. Referencing the deck diagram above the letter K represents _____.
    a. blocking
    b. joist
    c. decking
    d. rim joist
18. Referencing the deck diagram above the letter L represents _____.
    a. blocking
    b. joist
    c. decking
    d. rim joist
19. Referencing the deck diagram above the letter E represents _____.
    a. existing house floor
    b. flashing
    c. ½" lag bolt with washer
    d. ledger board
20. Referencing the deck diagram above the letter F represents _____.
    a. existing house floor
    b. flashing
    c. ½" lag bolt with washer
    d. ledger board
21. Referencing the deck diagram above the letter G represents _____.
    a. existing house floor
    b. flashing
    c. ½" lag bolt with washer
    d. ledger board
22. Referencing the deck diagram above the letter H represents _____.
    a. existing house floor
    b. flashing

c. ½" lag bolt with washer
d. ledger board

23. Referencing the deck diagram above the letter A represents _____.
a. frost footing
b. concrete pier
c. post base connector
d. drop beam

24. Referencing the deck diagram above the letter B represents _____.
a. frost footing
b. concrete pier
c. post base connector
d. drop beam

25. Referencing the deck diagram above the letter C represents _____.
a. frost footing
b. concrete pier
c. post base connector
d. drop beam

26. Referencing the deck diagram above the letter D represents _____.
a. frost footing
b. concrete pier
c. post base connector
d. drop beam

SECTION 1: GENERAL REQUIREMENTS

1. All lumber, including for decking, must be pressure-preservative-treated and must be either douglas fir/larch, hemlock/fir, spruce/pine/fir (SPF), or southern pine, of grade #2 or better – unless a naturally durable species such as a western red cedar is used. Lumber in contact with the ground must be rated as "ground-contact." The lumber must be identified by the grade mark of, or certificate of inspection issued by, a professional lumber-grading or inspection bureau or agency (www.alsc.org).

Note: Not all treated lumber is rated for ground contact. See Table C-1 in Appendix C for further information.

2. Wood-plastic composites must bear a label indicating their performance criteria and compliance with ASTM D7032.

Note: Wood-plastic composites are materials composed of wood fibers or powder that is bound with plastic and used typically as decking and elements of a guardrail or handrail.

Note: When using a wood-plastic composite, exercise caution as some composite members do not have the same capabilities as their equivalent wood sizes.

3. Nails must be threaded, which includes ring-shanked (annular-grooved) and spiral-grooved.

Note: A ⅛-inch pilot hole is recommended for all toe-nailing locations.

4. All fasteners must be galvanized steel, stainless steel, or approved for use with preservative-treated lumber.

5. Throughout this document, ½-inch-diameter bolts and lag screws are specified for various connections. Edge distance and spacing requirements are based on ½-inch-diameter fasteners. If larger (or smaller) fasteners are specified, edge distance and spacing need to be adjusted.

6. Carriage-bolts may be substituted where through-bolts are specified, if carriage-bolt washers are installed at the bolt head.

Note: Carriage-bolt washers have square holes.

27. Wood-plastic composites must bear a label indicating their performance criteria and compliance with_____.

a. ASTM A123
b. ASTM D7032
c. ASTM F1667
d. ASTM B18.2.1

28. All treated lumber is rated for ground contact. See Table C-1 in Appendix C for further information.
a. true
b. false

29. All lumber, including for decking, must be pressure-preservative-treated and must be either douglas fir/larch, hemlock/fir, spruce/pine/fir (SPF), or southern pine, of grade #____ or better – unless a naturally durable species such as a western red cedar is used
a. 1
b. 2
c. 3
d. all of the above

30. Lumber in contact with the ground must be rated as "_____."
a. underground-contact
b. ground-contact
c. below-contact
d. none of the above

31. A ___-inch pilot hole is recommended for all toe-nailing locations.
a. 1/16
b. 1/8
c. 1/4
d. 3/16

32. Carriage-bolts may be substituted where through-bolts are specified, if carriage-bolt _____are installed at the bolt head.
a. lock washers
b. washers
c. spacers
d. none of the above

33. Carriage-bolt washers have _____ holes.
a. round
b. rectangular
c. square
d. all of the above

34. Throughout this document, __-inch-diameter bolts and lag screws are specified for various connections. Edge distance and spacing requirements are based on ½-inch-diameter fasteners.
a. ¼
b. 3/8
c. 7/16
d. 1/2

---

7. Hardware, including joist hangers or post anchors, must be galvanized steel with 1.85 ounces of zinc per square foot (G-185 coating), or stainless steel. All fasteners that are used with any hardware must be the same material as the hardware. All hardware must be installed in accordance with any instructions from the manufacturer.
Note: For galvanized steel, look for product lines such as "Zmax," "Triple Zinc," or "Gold Coat."
Note: Galvanized steel is not compatible with stainless steel, which can result in rapid corrosion and structural failure.

Note: Hardware and fasteners that are beneath a hot tub which uses salt-water disinfection should be stainless steel, grade 304 or 316.
8. Every deck must have an electrical outlet along the perimeter of the deck and within 6.5 feet of the floor. See chapter SPS 316 of the Wisconsin Administrative Code for requirements about installing electrical wiring.
9. A deck constructed in accordance with these standards is not approved for concentrated loads that exceed 40 pounds per square foot (psf), such as from privacy screens, planters, built-in seating, hot tubs, stairs for multiple-level decks, or from snow-drift loads or sliding-snow loads. Engineering analysis is needed for these loads.
Note: Publication *DCA 6* from the American Wood Council is considered equivalent to these standards and can be used to obtain a permit in Wisconsin. Go to awc.org to learn more or to download *DCA 6.*
Note: See Appendix C for features of a deck which are somewhat uncommon or which have more complexity than is addressed in this Appendix – such as design values for joists consisting of western cedar or red pine, framing details around chimneys and bay windows, or ledger boards for metal-plate-connected wood floor trusses. Appendix C also includes reference material, such as more-detailed specifications for fasteners.
10. Specifications for fasteners and hardware**.** All nails must meet the requirements of ASTM F1667. Wood screws must meet the requirements of ANSI/ASME B18.6.1. Bolts and lag screws must meet the requirements of ANSI/ASME B18.2.1.
Fasteners to be hot-dipped galvanized must meet the requirements of ASTM A153, *Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware,* Class D for fasteners 3/8" diameter and smaller or Class C for fasteners with diameters over 3/8".
Fasteners other than nails and timber rivets may consist of mechanically deposited zinc-coated steel with coating weights in accordance with ASTM B695, Class 55, minimum.
Hardware to be hot-dipped prior to fabrication must meet ASTM A653, *Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process,* G-185 coating. Hardware to be hot-dipped galvanized after fabrication must meet ASTM A123, *Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.*
11. Safety glazing at decks shall be in accordance with the safety glazing requirements of the UDC.

35. For galvanized steel, look for product lines such as "_____."
    a. Zmax
    b. Triple Zinc
    c. Gold Coat
    d. all of the above
36. Hardware and fasteners that are beneath a hot tub which uses salt-water disinfection should be stainless steel, grade _____.
    a. 304
    b. 316
    c. 314
    d. both a & b
37. Hardware, including _____, must be galvanized steel with 1.85 ounces of zinc per square foot (G-185 coating), or stainless steel.
    a. joist hangers
    b. post anchors
    c. none of the above
    d. both a & b
38. All fasteners that are used with any hardware must be the_____ material as the hardware.
    a. similar
    b. coated

c. same
d. all of the above

39. All hardware must be installed in accordance with _____.
a. inspector's recommendations
b. inspector's guidance
c. ASTM 2215
d. any instructions from the manufacturer

40. Every deck must have an electrical outlet along the perimeter of the deck and within ____ feet of the floor. See chapter SPS 316 of the Wisconsin Administrative Code for requirements about installing electrical wiring.
a. 5
b. 5.5
c. 6
d. 6.5

41. A deck constructed in accordance with these standards is not approved for concentrated loads that exceed 40 pounds per square foot (psf), such as from ____. Engineering analysis is needed for these loads.
a. privacy screens or planters
b. built-in seating or hot tubs
c. stairs for multiple-level decks, or from snow-drift loads or sliding-snow loads
d. all of the above

42. See Appendix ____ for features of a deck which are somewhat uncommon or which have more complexity than is addressed in this Appendix – such as design values for joists consisting of western cedar or red pine, framing details around chimneys and bay windows, or ledger boards for metal-plate-connected wood floor trusses.
a. A
b. B
c. C
d. D

43. Specifications for fasteners and hardware**.** All nails must meet the requirements of _____.
a. ASTM F1667
b. ANSI/ASME B18.6.1
c. ANSI/ASME B18.2.1
d. all of the above

44. Wood screws must meet the requirements of _____.
a. ASTM F1667
b. ANSI/ASME B18.6.1
c. ANSI/ASME B18.2.1
d. all of the above

45. Bolts and lag screws must meet the requirements of _____.
a. ASTM F1667
b. ANSI/ASME B18.6.1
c. ANSI/ASME B18.2.1
d. all of the above

46. Fasteners to be hot-dipped galvanized must meet the requirements of ASTM A153. Class __ for fasteners 3/8" diameter and smaller.
a. A
b. B
c. C
d. D

47. Fasteners to be hot-dipped galvanized must meet the requirements of ASTM A153. Class __ for fasteners with diameters over 3/8"
    a. A
    b. B
    c. C
    d. D
48. Fasteners other than nails and timber rivets may consist of mechanically deposited zinc-coated steel with coating weights in accordance with _____, Class 55, minimum.
    a. ASTM F1667
    b. ANSI/ASME B18.6.1
    c. ASTM B695
    d. all of the above
49. Hardware to be hot-dipped prior to fabrication must meet _____.
    a. ASTM A653
    b. ASTM A123
    c. none of the above
    d. both a & b
50. Hardware to be hot-dipped galvanized after fabrication must meet
    a. ASTM A653
    b. ASTM A123
    c. none of the above
    d. both a & b
51. Safety glazing at decks shall be in accordance with the safety glazing requirements of the _____.
    a. IRC
    b. IBC
    c. UDC
    d. none of the above

SECTION 2: FOOTINGS, AND POST CONNECTIONS

Footings must comply with all of the following:
1. Concrete must be used and must have a minimum compressive strength of 3,000 pounds per square inch.
2. Footing size and thickness must be in accordance with Table 1. (See sections 4 and 5 for determining post spacing and joist length.)
3. Post attachments must be in accordance with Figure 1 except expansion anchors are also permitted – and any instructions from the manufacturer of the anchor must be followed.
4. Post anchors must include a 1-inch-minimum base plate. Steel plates are not required.
5. Each post must bear directly over the middle one-third of a footing.
6. Footings must bear on solid ground below the frost penetration level or at least 48 inches below finished grade, whichever is deeper. Bearing onto unprepared fill material, organic soil, alluvial soil, or mud is prohibited. The bearing capacity of the soil is presumed to be at least 2000 pounds per square inch (psi), and must be verified by a building inspector prior to placement of concrete.
7. If the edge of a deck footing is closer than 5 feet to an existing house wall, the footing must bear at the same elevation as the existing footing for that wall.
8. Construction of footings over utility lines or any service pipe is prohibited.
Note: Call the utility provider before digging.

52. If the edge of a deck footing is closer than ___ feet to an existing house wall, the footing must bear at the same elevation as the existing footing for that wall.
    a. 1

b. 2
c. 4
d. 5

53. Construction of footings over utility lines or any service pipe is _____.
a. allow with proper separation
b. allowed
c. prohibited
d. all of the above

54. Footings must bear on solid ground _____ the frost penetration level.
a. at
b. even
c. above
d. below

55. Footings must bear on at least ____ inches below finished grade.
a. 36
b. 42
c. 48
d. 54

56. Bearing onto unprepared fill material, organic soil, alluvial soil, or mud is _____.
a. allow with proper separation
b. allowed
c. prohibited
d. all of the above

57. The bearing capacity of the soil is presumed to be at least _____ pounds per square inch (psi), and must be verified by a building inspector prior to placement of concrete.
a. 1000
b. 1500
c. 2000
d. 3000

58. Each post must bear directly over the middle _____ of a footing.
a. one-quarter
b. one-fifth
c. one-half
d. none of the above

59. Post anchors must include a ___-inch-minimum base plate.
a. 1
b. 1.5
c. 2
d. 3

60. Post anchors must be steel plates.
a. true
b. false

61. Post attachments must be in accordance with Figure 1 except expansion anchors are also_____.
a. prohibited
b. permitted
c. allowed by variance
d. none of the above

62. Post attachments instructions from the manufacturer of the anchor _____ be followed.
a. could
b. should

c. must
d. all of the above

63. Footing size and thickness must be in accordance with Table ____.
a. 1
b. 2
c. 3
d. all of the above

64. See sections ____ for determining post spacing and joist length.
a. 4
b. 5
c. none of the above
d. both a & b

65. Concrete must be used and must have a minimum compressive strength of _____ pounds per square inch.
a. 1000
b. 2000
c. 3000
d. both a & b

Table 1
FOOTING SIZE (In Inches)[1,2,3]

Joist Length		Post Spacing (Measured Center to Center)										
		4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
6'	Corner Footing	8	9	10	11	11	12	12	13	14	14	15
	Intermediate Footing	10	11	12	13	14	15	15	16	17	17	18
	Footing Thickness	6	6	6	6	6	6	6	6	6	6	8
7'	Corner Footing	9	10	11	11	12	13	13	14	15	15	16
	Intermediate Footing	11	12	13	14	15	16	17	17	18	19	19
	Footing Thickness	6	6	6	6	6	6	6	6	8	8	8
8'	Corner Footing	10	10	11	12	13	14	14	15	15	16	17
	Intermediate Footing	12	13	14	15	16	17	18	19	19	20	21
	Footing Thickness	6	6	6	6	6	6	8	8	8	8	8
9'	Corner Footing	10	11	12	13	14	14	15	16	16	17	18
	Intermediate Footing	12	14	15	16	17	18	19	20	20	21	22
	Footing Thickness	6	6	6	6	6	8	8	8	8	8	8
10'	Corner Footing	10	12	12	13	14	15	16	16	17	18	18
	Intermediate Footing	13	14	15	17	18	19	20	21	21	22	23
	Footing Thickness	6	6	6	6	8	8	8	8	8	8	10
11'	Corner Footing	11	12	13	14	15	16	16	17	18	19	19
	Intermediate Footing	13	15	16	17	19	20	21	22	22	23	24
	Footing Thickness	6	6	6	6	8	8	8	8	8	10	10
12'	Corner Footing	11	12	14	15	15	16	17	18	19	19	20
	Intermediate Footing	14	15	17	18	19	20	21	22	23	24	25
	Footing Thickness	6	6	6	8	8	8	8	8	10	10	10
13'	Corner Footing	12	13	14	15	16	17	18	19	19	20	21
	Intermediate Footing	14	16	17	19	20	21	22	23	24	25	26
	Footing Thickness	6	6	6	8	8	8	8	10	10	10	10
14'	Corner Footing	12	13	15	16	17	18	18	19	20	21	22
	Intermediate Footing	15	17	18	19	21	22	23	24	25	26	27
	Footing Thickness	6	6	8	8	8	8	10	10	10	10	10
15'	Corner Footing	12	14	15	16	17	18	19	20	21	22	22
	Intermediate Footing	15	17	19	20	21	23	24	25	26	27	28
	Footing Thickness	6	6	8	8	8	10	10	10	10	10	12
16'	Corner Footing	13	14	15	17	18	19	20	20	21	22	23
	Intermediate Footing	16	18	19	21	22	23	25	26	27	28	29
	Footing Thickness	6	8	8	8	8	10	10	10	10	12	12

1. All footing sizes are base diameters².
2. For square footings, insert the diameter (d) into the following formula: $\sqrt{((d/2)^2 \times \pi)}$. This number will give you the square dimension and must be rounded up to the nearest inch.
3. Joist length is the joist span plus any overhang beyond a beam. See section 5.4.

66. Post spacing is measured _____.
    a. end to center
    b. inside to inside
    c. center to center
    d. edge to edge
67. Using the table 1 above, a 12' joist with a corner footing and post spacing of 8' would require an ____ inch diameter footing or larger.
    a. 19
    b. 15
    c. 16
    d. 17
68. Using the table 1 above, a 12' joist with a corner footing and post spacing of 10' would require a ____ inch diameter footing or larger.
    a. 19
    b. 15
    c. 16
    d. 17
69. Using the table 1 above, a 12' joist with an intermediate footing and post spacing of 8' would require a ____ inch diameter footing or larger.
    a. 19
    b. 15
    c. 16
    d. 17
70. Using the table 1 above, a 12' joist with a corner footing and post spacing of 10' would require a ____ inch footing thickness or larger.
    a. 6
    b. 8
    c. 10
    d. 12
71. Using the table 1 above, a 12' joist with an intermediate footing and post spacing of 8' would require an ____ inch footing thickness or larger.
    a. 6
    b. 8
    c. 10
    d. 12
72. All footing sizes are based on _____.
    a. diameters²
    b. diameters² x π
    c. square shapes
    d. rectangular shapes
73. For _____ footings, insert the diameter (d) into the following formula: $\sqrt{((d/2)^2 \times \pi)}$. This number will give you the square dimension and must be rounded up to the nearest inch.
    a. square
    b. rectangle
    c. round
    d. all of the above
74. Joist length is the joist span ____ overhang beyond a beam.

a. plus half the
b. plus 1/3 the
c. plus any
d. none of the above

Figure 1
FOOTINGS

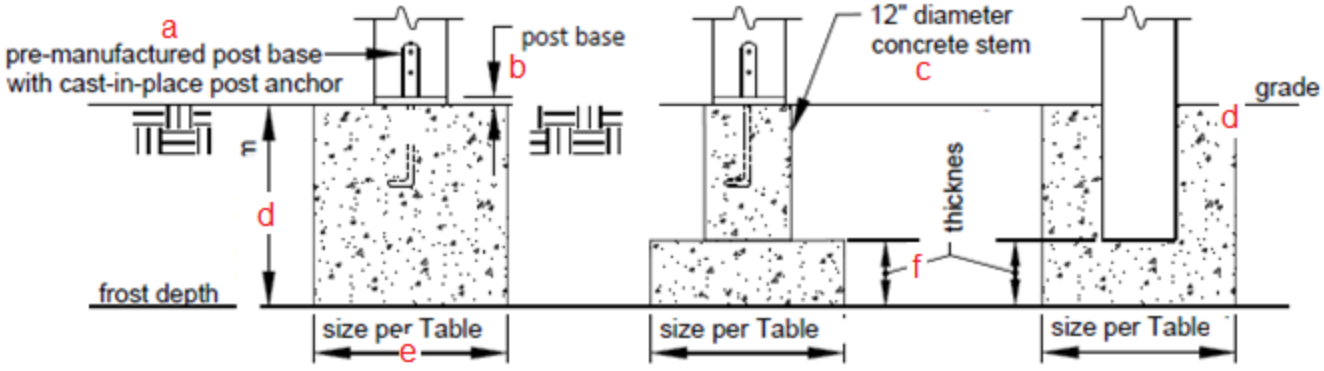

75. Concrete stem is represented by letter ___?
    a. a
    b. b
    c. c
76. Post base thin plate just above the footing is represented by letter ___.
    a. a
    b. b
    c. c
77. Post anchor is represented by letter ___.
    a. a
    b. b
    c. c
78. Frost depth is represented by letter ___.
    a. d
    b. e
    c. f
79. Footing size per table is represented by letter ___.
    a. d
    b. e
    c. f
80. Footing thickness is represented by letter ___.
    a. d
    b. e
    c. f

SECTION 3: POSTS AND POST-TO-BEAM CONNECTIONS

Posts must comply with all of the following:

1. The post height, measured from the top of the footing to the underside of the beam, must be in accordance with Table 2.

Table 2
MAXIMUM POST HEIGHT

Post Size	Maximum Height
4x4	6'
4x6	8'
6x6	14'

2. Any post supporting a beam splice must be 6 x 6 only.
3. Beams must be attached to posts by the appropriate methods shown in Figure 2 below. Toe-nailing of beams to posts is prohibited.
4. Post caps, as shown in Figure 2, must be specifically designed for 2- or 3-ply beams and the post size used. Attachment must be in accordance with the manufacturer's instructions.
5. It is recommended that cut-ends of posts should be field-treated with a wood preservative. These preservatives can be found in the paint department of most hardware or home-center stores.

81. The post height, measured from the _____.
    a. top of the footing to the top of the beam
    b. top of the footing to the beam center
    c. top of the footing to the underside of the beam
    d. none of the above
82. Any post supporting a beam splice must be _____ only.
    a. 4 x 4
    b. 4 x 6
    c. 6 x 6
    d. all of the above
83. Beams must be attached to posts by the appropriate methods shown in Figure ____.
    a. 1
    b. 2
    c. 3
    d. 4
84. Only just toe-nailing of beams to posts is prohibited.
    a. true
    b. false
85. Post caps, as shown in Figure 2, must be specifically designed for ___-ply beams and the post size used.
    a. 1
    b. 2
    c. 3
    d. both b & c
86. It is _____ that cut-ends of posts should be field-treated with a wood preservative.
    a. required
    b recommended
    c. mandated
    d. all of the above
87. Maximum post height for a 4 x 6 would be ____?
    a. 6'

b. 8’
c. 14’
d. all of the above

Figure 2
POST-TO-BEAM CONNECTIONS

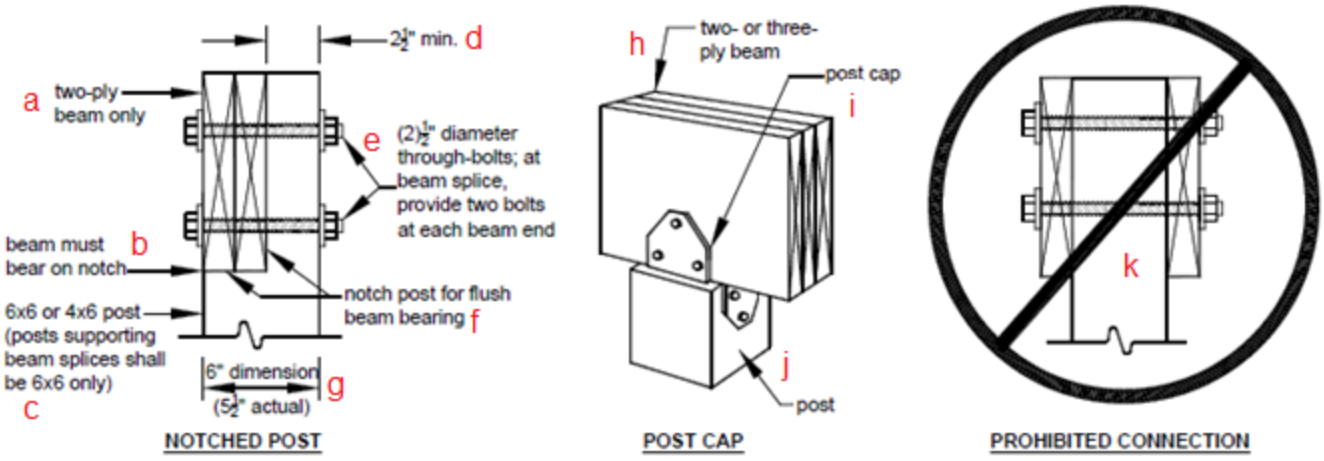

88. 2 ½” top of post is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
89. 6 x 6 for 4 x 6 is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
90. Beam must bear on notch is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
91. Two ply beam only is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
92. Two ½” diameter bolts is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
93. At beam splice provide two bolts at each beam end is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
94. Post notching is represented by letter ___.

a. e
b. f
c. g
d. h

95. Post width is represented by letter ___.
a. e
b. f
c. g
d. h

96. 2 or 3 ply beam is represented by letter ___.
a. e
b. f
c. g
d. h

97. Post cap is represented by letter ___.
a. i
b. j
c. k

98. The post is represented by letter ___.
a. i
b. j
c. k

99. Prohibited connection is represented by letter ___.
a. i
b. j
c. k



100. According to **Figure 2** (above) Post-To-Beam Connections above, this image directly above here would be a code compliant Post-To-Beam connection.
a. true
b. false

SECTION 4: BEAMS

Beams must comply with all of the following:

1. As shown in Figure 3, the beam-span length is measured between the centerlines of two adjacent posts and does not include the overhangs.
2. Beam size is determined using Table 3A or 3B. The depth of flush beams must be greater than or equal to the joist depth.
3. Beams may overhang past the center of the post up to one-fourth of the actual beam span, as shown in Figure 3.

4. Where multiple 2x members are used to assemble a beam, the plies of the beam must be fastened in accordance with Figure 4.
5. Pressure-preservative-treated glulam beams are permissible for spans longer than those shown in Table 3. However, a design and plan submission is required during the permit application process.

101. Where multiple 2x members are used to assemble a beam, the plies of the beam must be fastened in accordance with Figure ___.
    a. 1
    b. 2
    c. 3
    d. 4
102. Pressure-preservative-treated glulam beams are permissible for spans longer than those shown in Table ___.
    a. 1
    b. 2
    c. 3
    d. 4
103. Beams may overhang past the center of the post up to _____of the actual beam span
    a. 1/3
    b. 1/4
    c. 1/2
    d. 1/5
104. Beam size is determined using Table ____.
    a. 3A
    b. 3B
    c. 3C
    d. both a & b
105. The depth of flush beams must be _____ the joist depth.
    a. less than or equal
    b. greater than
    c. equal to
    d. both b & c
106. As shown in Figure 3, the beam-span _____ include the overhangs.
    a. does not
    b. does
    c. sometimes
    d. none of the above
107. As shown in Figure 3, the beam-span length is measured _____.
    a. between the inside edge of two adjacent posts
    b. between the outside edge of two adjacent posts
    c. between the centerlines of two adjacent posts
    d. none of the above

Figure 3
BEAM TYPES

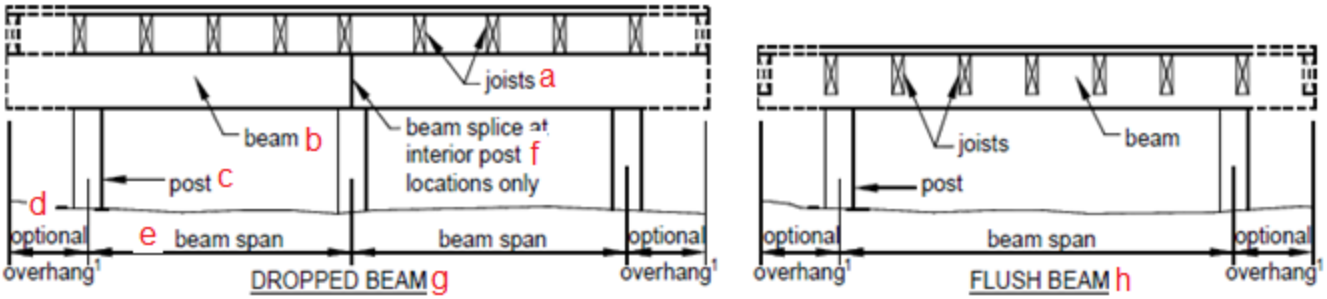

[1]The maximum length of the overhang is equal to one-fourth of the actual beam span length (0.25 x beam span).

108. The beam is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
109. The post is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
110. The optional overhang is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
111. The joist is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
112. The beam spam is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
113. the beam splice at interior post is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
114. The drop beam is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
115. The flush beam is represented by letter ___.
    a. e

b. f
c. g
d. h

Table 3A
MAXIMUM BEAM-SPAN LENGTH[1] FOR DOUGLAS FIR/LARCH[3], HEM/FIR[3], SPRUCE/PINE/FIR (SPF)[3], WESTERN CEDAR, PONDEROSA PINE[4], AND RED PINE[4]

Joist Span	(Number of Plies) Beam Size[2] – Inches											
	3x6 (2)2x6	3x8 (2)2x8	3x10 (2)2x10	3x12 (2)2x12	4x6	4x8	4x10	4x12	(3)2x6	(2)2x8	(2)2x10	(2)2x12
≤ 6'	5'-5"	6'-10"	8'-4"	9'-8"	6'-5"	8'-5"	9'-11"	11'-5"	7'-4"	9'-8"	12'-0"	13'-11"
≤ 8'	4'-8"	5'-11"	7'-3"	8'-5"	5'-6"	7'-3"	8'-7"	9'-11"	6'-8"	8'-6"	10'-5"	12'-1"
≤ 10'	4'-2"	5'-4"	6'-6"	7'-6"	4'-11"	6'-6"	7'-8"	8'-10"	6'-0"	7'-7"	9'-4"	10'-9"
≤ 12'	3'-10"	4'-10"	5'-11"	6'-10"	4'-6"	5'-11"	7'-0"	8'-1"	5'-6"	6'-11"	8'-6"	9'-10"
≤ 14'	3'-6"	4'-6"	5'-6"	6'-4"	4'-2"	5'-6"	6'-6"	7'-6"	5'-1"	6'-5"	7'-10"	9'-1"
≤ 16'	3'-1"	4'-1"	5'-1"	5'-11"	3'-11"	5'-2"	6'-1"	7'-0"	4'-9"	6'-0"	7'-4"	8'-6"
≤ 18'	2'-9"	3'-8"	4'-8"	5'-7"	3'-8"	4'-10"	5'-8"	6'-7"	4'-6"	5'-8"	6'-11"	8'-1"

1. Spans are based on 40 psf live load, 10 psf dead load, normal loading duration, wet service conditions, and deflections of Δ=L/360 for main span and L/180 for overhang with a 220 lb. point load.
2. Beam depth must be equal to or greater than joist depth if joist hangers are used (see Figure 8, Option 3).
3. Incising is assumed.
4. Design values based on northern species with no incising assumed.

116. Footnote 4. Design values based on northern species with no incising assumed is for _____
a. Red Pine
b. Ponderosa Pine
c. Western Cedar
d. both a & b

117. Footnote 3 Incising is assumed of for _____.
a. SPF
b. Hem/Fir
c. Douglas Fir/Larch
d. all of the above

118. Beam depth must be equal to or greater than joist depth if _____.
a. end nailed
b. toe nailed
c. joist hangers are used
d. all of the above

119. Spans are based on ____ psf live load normal loading duration.
a. 10
b. 20
c. 30
d. 40

120. Spans are based on ___ psf dead load normal loading duration.
a. 10
b. 20
c. 30
d. 40

121. Spans are based on ____ service conditions
   a. damp
   b. dry
   c. wet
   d. none of the above

122 Spans are based on deflections of Δ=L/_____ for main span.
   a. 180
   b. 220
   c. 360
   d. 480

123. Spans are based on L/___ for overhang
   a. 180
   b. 220
   c. 360
   d. 480

124. Spans are based on with a ___ lb. point load.
   a. 180
   b. 220
   c. 360
   d. 480

Table 3B
MAXIMUM BEAM-SPAN LENGTH FOR SOUTHERN PINE[1]

Joist Span	(Number of Plies) Beam Size[2] – Inches							
	(2) 2x6	(2) 2x8	(2) 2x10	(2) 2x12	(3) 2x6	(3) 2x8	(3) 2x10	(3) 2x12
≤ 6'	6'-11"	8'-9"	10'-4"	12'-2"	8'-2"	10'-10"	13'-0"	15'-3"
≤ 8'	5'-11"	7'-7"	9'-0"	10'-7"	7'-5"	9'-6"	11'-3"	13'-3"
≤ 10'	5'-4"	6'-9"	8'-0"	9'-5"	6'-8"	8'-6"	10'-0"	11'-10"
≤ 12'	4'-10"	6'-2"	7'-4"	8'-7"	6'-1"	7'-9"	9'-2"	10'-9"
≤ 14'	4'-6"	5'-9"	6'-9"	8'-0"	5'-8"	7'-2"	8'-6"	10'-0"
≤ 16'	4'-3"	5'-4"	6'-4"	7'-6"	5'-3"	6'-8"	7'-11"	9'-4"
≤ 18'	4'-0"	5'-0"	6'-0"	7'-0"	5'-0"	6'-4"	7'-6"	8'-10"

1. Spans are based on 40 psf live load, 10 psf dead load, normal loading duration, wet service conditions, and deflections of Δ=L/360 for main span and L/180 for overhang with a 220 lb. point load.
2. Beam depth must be equal to or greater than joist depth if joist hangers are used (see Figure 8, Option 3).

125. The above table is for _____.
   a. a. Red Pine
   b. Ponderosa Pine
   c. Western Cedar
   d. Southern Pine

126. Using the above table, 3 plies, 2 x 10 beam, < 12', the maximum beam spam length would be ___.
   a. 10'
   b. 9'-2"
   c. 7"-9"
   d. 7"-2"

127. Using the above table, 3 plies, 2 x 8 beam, < 12', the maximum beam spam length would be ___.
   a. 10'

b. 9’-2”
c. 7”-9”
d. 7”-2”

Figure 4
BEAM ASSEMBLY

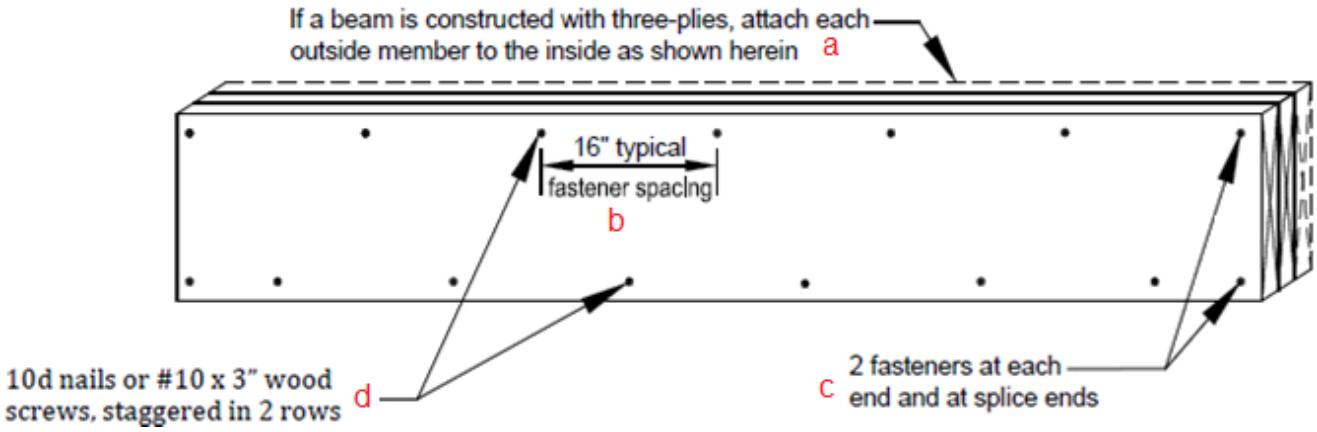

128. 2 fasteners at each end are represented by letter ___.
a. a
b. b
c. c
d. d
129. 2 fasteners at splice ends are represented by letter ___.
a. a
b. b
c. c
d. d
130. 10 d nails staggered in 2 rows is represented by letter ___.
a. a
b. b
c. c
d. d
131. #10 x 3” wood screws staggered in 2 rows is represented by letter ___.
a. a
b. b
c. c
d. d
132. If beam is constructed with 3 plies, attach each outside member to the inside member is represented by letter ___.
a. a
b. b
c. c
d. d
133. 16” typical fastener spacing is represented by letter ___.
a. a
b. b
c. c
d. d

SECTION 5: JOISTS

Joists must comply with all of the following:
1. The joist-span length is measured between the centerline of bearing at each joist-span end and does not include the overhangs. Use Table 4 to determine the joist size based on span length and joist spacing. See section 12.4 for limits on joist spacing if the decking consists of a wood-plastic composite.
2. See Figures 5 through 7 for joist-span types.
3. Joists must bear at least 3 inches nominal onto beams, unless joist hangers are used in accordance with section 7.
4. Joists may overhang past the center of the beam up to one-fourth of the actual joist span.
5. Provide full-depth 2x blocking or bridging for 2x10 or deeper joists at intervals not exceeding 8 feet – except the blocking can be reduced to 60% of the height if placed above a beam, for drainage purposes. Attach the blocking or bridging with (3)10d toe-nails at each end.
6. Attach a continuous rim joist as shown in Figures 5 and 7 unless blocking or bridging is provided for each joist at the beam where a joist overhang begins. Attach the rim joist to the end of each joist with (3)10d nails or (3)#10 by 3-inch wood screws.

134. Provide full-depth 2x blocking or bridging for ____ or deeper joists.
    a. 2 x 6
    b. 2 x 8
    c. 2 x 10
    d. all of the above
135. Except the blocking can be reduced to ___ of the height if placed above a beam, for drainage purposes.
    a. 50%
    b. 60%
    c. 70%
    d. none of the above
136. Attach the _____ with (3)10d toe-nails at each end.
    a. blocking
    b. bridging
    c. both a & b
    d. none of the above
137. Provide full-depth 2x blocking or bridging at intervals not exceeding __ feet.
    a. 6
    b. 7
    c. 8
    d. none of the above
138. The joist-span length is measured between the _____ of bearing at each joist-span end
    a. outside edge
    b. inside edge
    c. centerline
    d. all of the above
139. The joist-span length does not include the overhangs.
    a. true
    b. false
140. Joists must bear at least ___" nominal onto beams, unless joist hangers are used in accordance with section 7.
    a. 1
    b. 2
    c. 3
    d. 4
141. Joists may overhang past the center of the beam up to one-_____ of the actual joist span

a. eighth
b. fourth
c. third
d. half

142. Attach a continuous rim joist to the end of each joist with _____.
a. (3) 10d nails
b. (3) #10 by 3-inch wood screws
c. both a or b
d. none of the above

Figure 5

a JOISTS WITH DROPPED BEAM – DECK ATTACHED AT HOUSE b

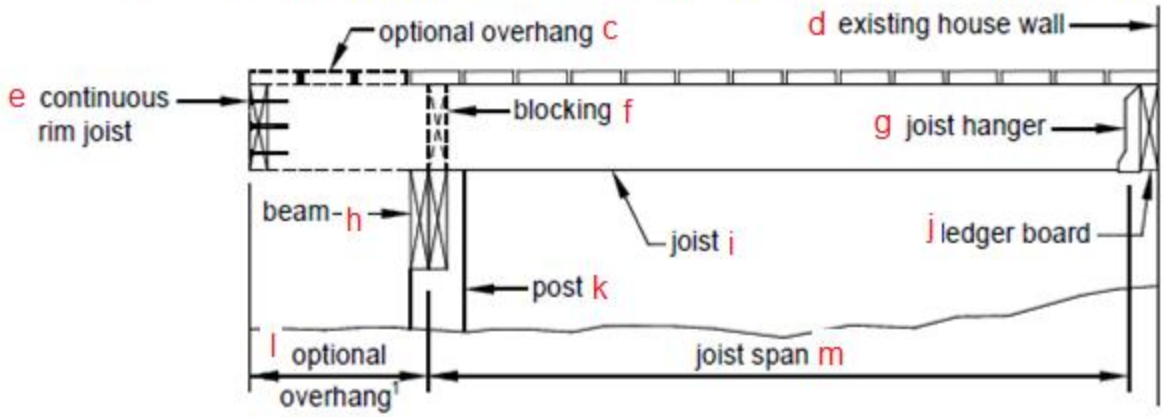

[1]The maximum length of the overhang is equal to one-fourth of the actual joist span length (0.25 x joist span).

143. Joist with drop beam is represented by letter ___.
a. a
b. b
c. c
d. d

144. Optional overhang is represented by letter ___.
a. a
b. b
c. c
d. d

145. Deck attached to house is represented by letter ___.
a. a
b. b
c. c
d. d

146. Existing house wall is represented by letter ___.
a. a
b. b
c. c
d. d

147. Continuous rim joist is represented by letter ___.
a. e
b. f
c. g
d. h

148. Beam is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
149. Joist hanger is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
150. Blocking is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
151. Joist is represented by letter ___.
    a. i
    b. j
    c. k
    d. m
152. Ledger board is represented by letter ___.
    a. i
    b. j
    c. k
    d. m
153. Joist span is represented by letter ___.
    a. i
    b. j
    c. k
    d. m

154. Post is represented by letter ___.
    a. i
    b. j
    c. k
    d. m

Figure 6

JOISTS WITH FLUSH BEAM – DECK ATTACHED AT HOUSE

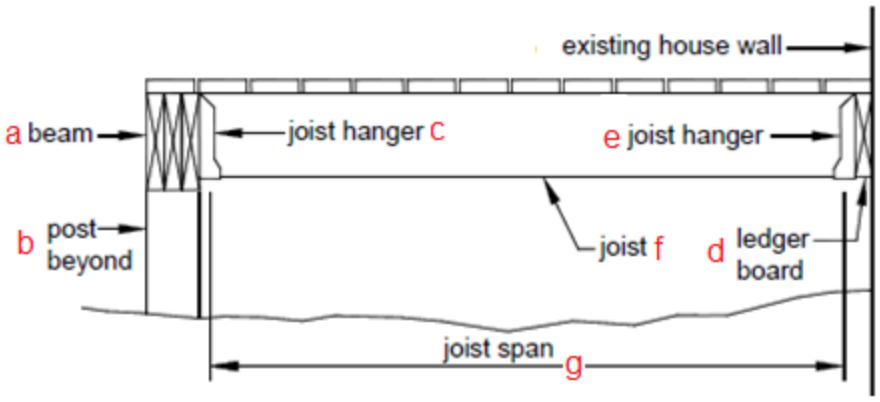

155. Beam is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
156. Joist hanger is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
157. Post beyond is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
158. Ledger board is represented by letter ___.
    a. a
    b. b
    c. c
    d. d

Figure 7
JOISTS WITH TWO DROPPED BEAMS/FREE-STANDING DECK d
(See section 10 for more information.)

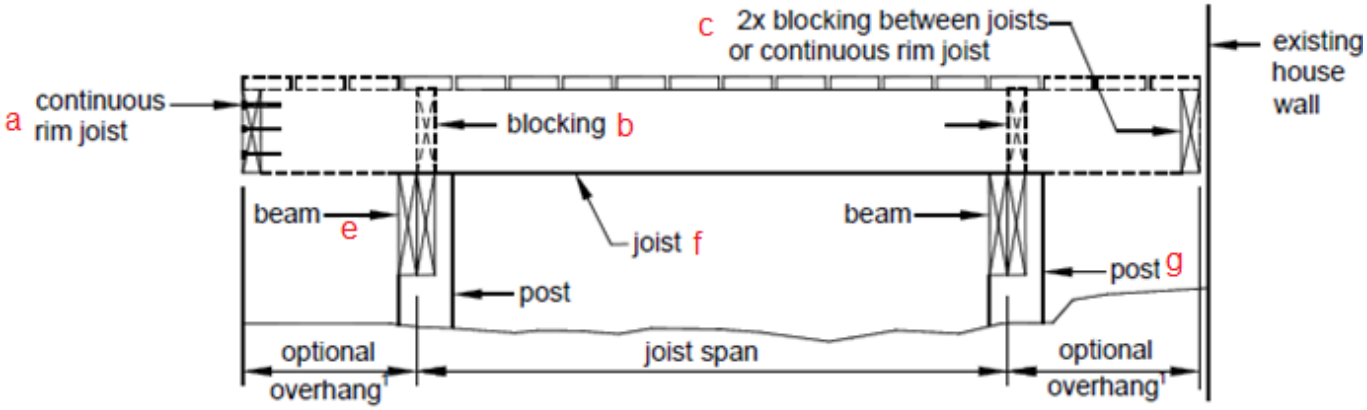

[1]The maximum length of the overhang is equal to one-fourth of the actual joist span length (0.25 x joist span).

159. Blocking is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
160. Continuous rim joist is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
161. Free standing deck is represented by letter ___.

a. a
b. b
c. c
d. d

162. 2 x blocking between joists or continuous rim joist is represented by letter ___.
a. a
b. b
c. c
d. d

Table 4
MAXIMUM JOIST-SPAN LENGTH[1]

Joist Spacing (on center)	Joist Size	Douglas Fir/Larch, Hem/Fir, SPF[2]		Southern Pine	
		Without Overhang	With Overhangs	Without Overhang	With Overhangs
12"	2x6	9'-1"	8'-1"	9'-6"	8'-7"
	2x8	12'-6"	9'-5"	13'-1"	10'-1"
	2x10	15'-8"	13'-7"	16'-2"	14'-6"
	2x12	18'-0"	18'-0"	18'-0"	18'-0"
16"	2x6	8'-3"	8'-0"	8'-7"	8'-7"
	2x8	11'-1"	9'-5"	11'-10"	10'-1"
	2x10	13'-7"	13'-7"	14'-0"	14'-0"
	2x12	15'-9"	15'-9"	16'-6"	16'-6"
24"	2x6	6'-9"	6'-9"	7'-6"	7'-6"
	2x8	9'-1"	9'-1"	9'-8"	9'-8"
	2x10	11'-1"	11'-1"	11'-5"	11'-5"
	2x12	12'-10"	12'-10"	13'-6"	13'-6"

[1]Spans are based on 40 psf live load, 10 psf dead load, normal loading duration, wet service conditions and deflections of Δ=L/360 for main span and L/180 for overhang with a 220 lbs. point load.

[2]Incising is assumed.

163. Spans are based on ____ psf live load normal loading duration.
a. 10
b. 20
c. 30
d. 40

164. Spans are based on ___ psf dead load normal loading duration.
a. 10
b. 20
c. 30
d. 40

165. Spans are based on ____ service conditions
a. damp
b. dry
c. wet
d. none of the above

166. Spans are based on deflections of Δ=L/_____ for main span.

a. 180
b. 220
c. 360
d. 480

167. Spans are based on L/___ for overhang
a. 180
b. 220
c. 360
d. 480

168. Spans are based on with a ___ lb. point load.
a. 180
b. 220
c. 360
d. 480

169. Joist spacing 16”, joist size 2 x 10, Southern Pine with overhang can span a maximum of _____.
a. 10’ 1”
b. 11’ 10”
c. 16’ 6”
d. 14’

170. Joist spacing 16”, joist size 2 x 10, SPF with overhang can span a maximum of _____.
a. 10’ 1”
b. 11’ 10”
c. 13’ 7”
d. 14’

171. Joist spacing 16”, joist size 2 x 10, Southern Pine without overhang can span a maximum of _____.
a. 10’ 1”
b. 11’ 10”
c. 16’ 6”
d. 14’

172. Incising is _____.
a. prohibited
b. assumed
c. both a & b
d. none of the above

SECTION 6: JOIST-TO-BEAM CONNECTIONS

Joists must be attached to beams in accordance with Figure 8 and all of the following:
1. Use Options 1 or 2 if joists bear on a dropped beam.
2. Use Option 3 if joists bear at a flush beam; see section 7 for hanger requirements.
3. Mechanical fasteners or hurricane clips must have a minimum capacity of 100 pounds in both uplift and lateral directions. Installation must be in accordance with the manufacturer's instructions.

173. JOIST-TO-BEAM CONNECTIONS. Use _____ if joists bear on a dropped beam.
a. Option 1
b. Option 2
c. both a & b
d. Option 3

174. JOIST-TO-BEAM CONNECTIONS. Use _____ if joists bear at a flush beam.
a. Option 1
b. Option 2

c. both a & b
d. Option 3

175. JOIST-TO-BEAM CONNECTIONS. Mechanical fasteners or hurricane clips must have a minimum capacity of 100 pounds in _____ direction.
a. uplift
b. lateral
c. both a & b
d. none of the above

176. JOIST-TO-BEAM CONNECTIONS. Installation must be in accordance with the ____ instructions.
a. inspector's
b. lumber supplier's
c. manufacturer's
d. all of the above

Figure 8
JOIST-TO-BEAM CONNECTIONS

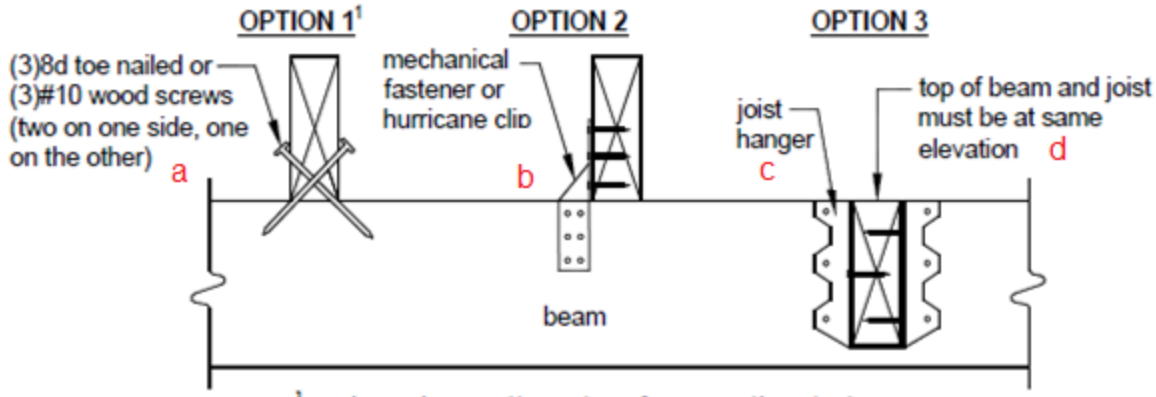

[1]Option 1 is not allowed on free-standing decks.

177. Mechanical fastener or hurricane clip is represented by letter ___.
a. a
b. b
c. c
d. d

178. Joist hanger is represented by letter ___.
a. a
b. b
c. c
d. d

179. Top of beam and joist must be the same elevation is represented by letter ___.
a. a
b. b
c. c
d. d

180. Toe nailing or wood screws are represented by letter ___.
a. a
b. b
c. c
d. d

181. If toe nailing or wood screwing the joist to beam, _____.
a. 2 fasteners on both sides required

b. 2 fasteners on one side and 1 fastener on the other side required
c. 1 fastener on each side required
d. none of the above

SECTION 7: JOIST HANGERS

Joist hangers must comply with all of the following:
1. The joist-hanger depth (d, as shown in Figure 9) must be at least 60 percent of the joist depth.
2. The manufactured width of the joist hanger must accommodate the number of plies being carried.
3. Do not bend hanger flanges to accommodate field conditions.
4. For joist hangers that are fastened to a ledger board, screws which are recommended by the manufacturer must be used. All other fasteners are permitted to be nails. The number of fasteners and the manner in which they are used must be as specified by the manufacturer.
5. Use joist hangers with inside flanges if clearances to the edge of the beam or ledger board dictate.
6. Clip-angles or brackets used to support framing members in lieu of joist hangers are prohibited.
7. Joists must not frame in from both sides of the same beam. Engineering analysis is needed if more beams are needed than are shown in Figures 5 to 7.
8. Each joist hanger must have the minimum capacity listed in Table 5.

182. Joists _____ not frame in from both sides of the same beam.
a. may
b. should
c. must
d. all of the above

183. Each joist hanger must have the minimum capacity listed in Table ___.
a. 1
b. 2
c. 3 & 4
d. 5

184. _____ used to support framing members in lieu of joist hangers are prohibited
a. Clip-angles
b. Brackets
c. Toe nailing
d. both a & b

185. Use joist hangers with _____ flanges if clearances to the edge of the beam or ledger board dictate.
a. outside
b. inside
c. both a & b
d. none of the above

186. For joist hangers that are fastened to a ledger board, _____ which are recommended by the manufacturer must be used.
a. screws
b. galvanized staples
c. galvanized drywall screws
d. all of the above

187. All other fasteners are permitted to be ____.
a. nails
b. galvanized staples
c. galvanized drywall screws
d. all of the above

188. The number of fasteners and the manner in which they are used must be as specified by the _____.

a. inspector
b. lumber supplier
c. manufacturer
d. all of the above

189. Field bends on hanger flanges to accommodate field conditions are _____.
a. allowed
b. allowed if recommended by the lumber supplier
c. not allowed
d. none of the above

190. The manufactured _____ of the joist hanger must accommodate the number of plies being carried.
a. height
b. length
c. width
d. all of the above

191. The joist-hanger depth (d, as shown in Figure 9) must be at least ___ percent of the joist depth.
a. 50
b. 60
c. 70
d. 40

Figure 9
JOIST HANGERS

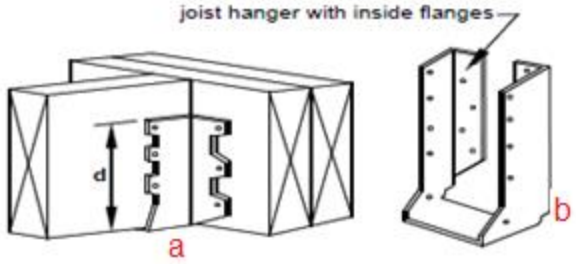

Table 5
JOIST HANGER DOWNLOAD

Joist Size	Minimum Capacity, lbs
2x6	500
2x8	500
2x10	600
2x12	700

192. Hanger "b" represent a _____ hanger.
a. outside
b. inside
c. angle
d. none of the above

193. Hanger "a" represents an _____ hanger.
a. outside
b. inside
c. angle
d. none of the above

194. Joist hanger download minimum capacity for a 2 x 12 would be _____,
a. 500
b. 600
c. 700
d. none of the above

195. Joist hanger download minimum capacity for a 2 x 8 would be _____.
a. 500
b. 600
c. 700
d. none of the above

SECTION 8: LEDGER ATTACHMENTS

General requirements. Ledger boards must be attached to the existing house in accordance with all of the following and section 9. Compliance is critical to ensure the safety and structural stability of your deck.

1. The ledger-board depth must be greater than or equal to the depth of the deck joists, but not less than a 2x8 – and must be less than or equal to the depth of the band board on the house.
2. The ledger board must be attached in accordance with one of the conditions shown in Figures 11 through 13 – except if metal-plate-connected wood floor trusses were used in the house, see the text below for manufactured wood trusses.
3. The existing band board on the house must be capable of supporting the deck. If this cannot be verified or if existing conditions differ from the details here, then a free-standing deck or an engineered design is required.
4. The top of the ledger board and the top of the deck joists must be at the same elevation.

196. Ledger boards must be attached to the existing house in accordance with only one of the following or just section 9.
    a. true
    b. false

197. The top of the ledger board and the top of the deck joists may be at the same elevation.
    a. true
    b. false

198. The ledger board must be attached in accordance with one of the conditions shown in Figures ___.
    a. 11
    b. 12
    c. 13
    d. all of the above

199. The ledger board exception- if metal-plate-connected wood floor _____ were used in the house, see the text below for manufactured wood trusses.
    a. rim board
    b. sheeting
    c. trusses
    d. all of the above

200. The ledger-board depth must be greater than or equal to the depth of the deck joists, but not less than a ____ – and must be less than or equal to the depth of the band board on the house.
    a. 2 x 4
    b. 2 x 6
    c. 2 x 8
    d. 2 x 10

201. The existing band board on the house must be capable of supporting the deck. If this cannot be verified or if existing conditions differ from the details here, then _____ is required.
    a. a free-standing deck
    b. an engineered design
    c. both a & b
    d. none of the above

202. Ledger boards must be attached to the existing house in accordance with all of the following and section 9. Compliance is critical to ensure the _____ of your deck.
    a. safety
    b. structural stability
    c. both a & b

d. none of the above

Wood I-joists. Many homes are constructed with wood I-joists, as shown in Figure 10. Rather than utilize a 2x band board, these systems are often constructed with a minimum 1-inch-thick engineered wood product (EWP) band board capable of supporting a deck. If a minimum 1-inch EWP or 2x band board is not present, then a free-standing deck is required, as addressed in section 10.

Manufactured wood trusses. A metal-plate-connected wood truss (MPCWT) is an engineered, prefabricated structural component that is designed for each specific application. MPCWT systems that are used in residential floors are often installed with a 2x4 lumber "ribbon" board at the ends of the trusses to tie the ends of the trusses together (see Detail 1 in section 7 of Appendix C.). The ribbon board, by itself, is not intended to support the deck ledger and deck. Installing a residential deck where the floor for the house uses a MPCWT system must be in accordance with a standard detail provided by the truss designer, a corresponding detail in section 7 of Appendix C, or a full plan submission – unless the deck is free-standing as addressed in section 10.

Siding and flashing. Flashing must be installed in accordance with all of the following:
1. The exterior finish, such as house siding, must be removed in the area for the ledger board prior to the installation of the ledger board.
2. Continuous flashing with a drip edge, as shown in Figure 11, is required at a ledger board that is attached to wood-framed construction. Caulking is needed with the flashing at a threshold to prevent water intrusion due to splash from the deck or due to melting snow and ice.
3. Flashing must be a corrosion-resistant metal having a minimum nominal 0.019-inch thickness – such as galvanized steel coated with 1.85 ounces of zinc per square foot (G-185 coating), copper (attached using copper nails only), or stainless steel – or must be a UV-resistant plastic recommended by its manufacturer for this use. Do not use aluminum in direct contact with lumber treated with preservatives that contain copper, such as ACQ, copper azole, or ACZA.

203. Many homes are constructed with wood I-joists, as shown in Figure 10. Rather than utilize a 2x band board, these systems are often constructed with a minimum 1-inch-thick engineered wood product (EWP) band board capable of supporting a deck. If a minimum 1-inch EWP or 2x band board is not present, then a free-standing deck is required, as addressed in section 10. This defines:
a. Standard dimensional floor joist
b. Manufactured wood trusses
c. Wood I-joists
d. none of the above

204. A metal-plate-connected wood truss (MPCWT) is an engineered, prefabricated structural component that is designed for each specific application. MPCWT systems that are used in residential floors are often installed with a 2x4 lumber "ribbon" board at the ends of the trusses to tie the ends of the trusses together (see Detail 1 in section 7 of Appendix C.). The ribbon board, by itself, is not intended to support the deck ledger and deck. Installing a residential deck where the floor for the house uses a MPCWT system must be in accordance with a standard detail provided by the truss designer, a corresponding detail in section 7 of Appendix C, or a full plan submission – unless the deck is free-standing as addressed in section 10.
a. Standard dimensional floor joist
b. Manufactured wood trusses
c. Wood I-joists
d. none of the above

205. Flashing must be installed in accordance with the following:
a. The interior finish, such as house siding, must be removed in the area for the ledger board after to the installation of the ledger board.

b. Non-continuous flashing with a drip edge, as shown in Figure 1, is required at a ledger board that is attached to wood-framed construction. Caulking is not needed with the flashing at a threshold to prevent water intrusion due to splash from the deck or due to melting snow and ice.
c. Flashing may be a non-corrosion-resistant plasticl having a minimum nominal 0.19-inch thickness – such as galvanized steel coated with .185 ounces of zinc per square foot (G-185 coating), copper (attached using copper nails only), or stainless steel – or must be a UV-resistant plastic recommended by its manufacturer for this use. Do not use aluminum in direct contact with lumber treated with preservatives that contain copper, such as ACQ, copper azole, or ACZA.
d. none of the above

Figure 11
ATTACHMENT OF LEDGER BOARD TO BAND BOARD OR BAND JOIST

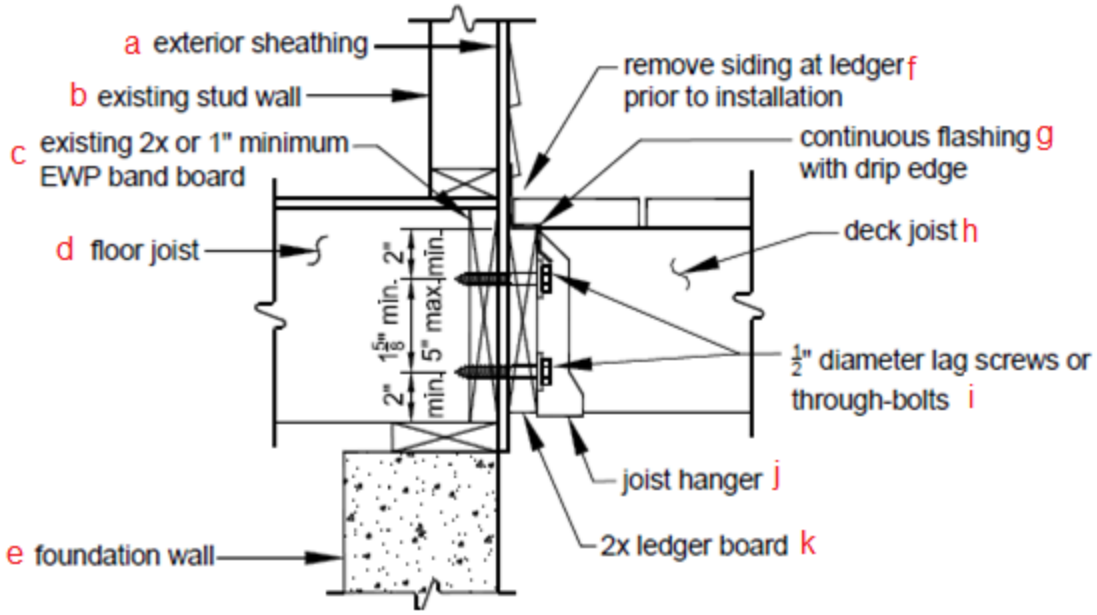

206. Floor joist is represented by letter ___.
a. a
b. b
c. c
d. d

207. EWP band board is represented by letter ___.
a. a
b. b
c. c
d. d

208. Building stud wall is represented by letter ___.
a. a
b. b
c. c
d. d

209 . Exterior sheeting is represented by letter ___.
a. a
b. b
c. c
d. d

210. Foundation wall is represented by letter ___.
    a. e
    b. f
    c. g
    d. h

211 Remove siding at ledger board prior to installation is represented by letter ___.
    a. e
    b. f
    c. g
    d. h

212 Deck joist is represented by letter ___.
    a. e
    b. f
    c. g
    d. h

213. Continuous flashing with drip edge is represented by letter ___.
    a. e
    b. f
    c. g
    d. h

214. ½" diameter lag screws for through bolts are represented by letter ___.
    a. i
    b. j
    c. k
    d. l

215. Joist hanger is represented by letter ___.
    a. i
    b. j
    c. k
    d. l

216. 2 x ledger board is represented by letter ___.
    a. i
    b. j
    c. k
    d. l

Figure 12
ATTACHMENT OF LEDGER BOARD TO SOLID FOUNDATION

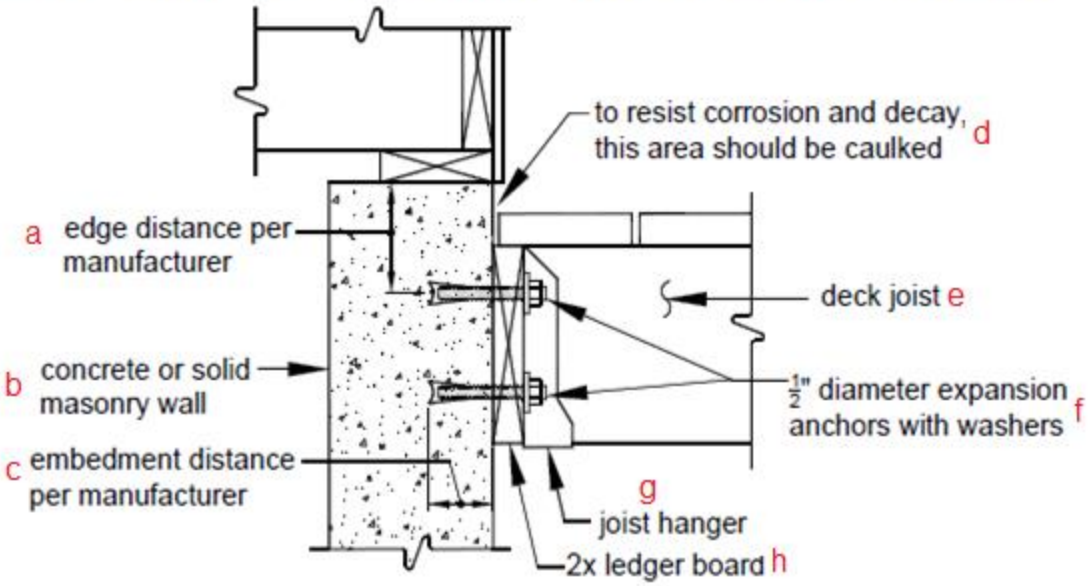

217. This area should be caulked is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
218. Embedment distance per manufacturer is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
219. Solid masonry wall is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
220. Edge distance per manufacturer is represented by letter ___.
    a. a
    b. b
    c. c
    d. d
221. Deck joist is represented by letter ___.
    a. e
    b. f
    c. g
    d. h
222. 1/2" expansion anchors with washer are represented by letter ___.
    a. e
    b. f
    c. g
    d. h
223. Joist hanger is represented by letter ___.

a. e
b. f
c. g
d. h

224. 2x ledger board is represented by letter ___.
a. e
b. f
c. g
d. h

Figure 13
ATTACHMENT OF LEDGER BOARD TO HOLLOW FOUNDATION

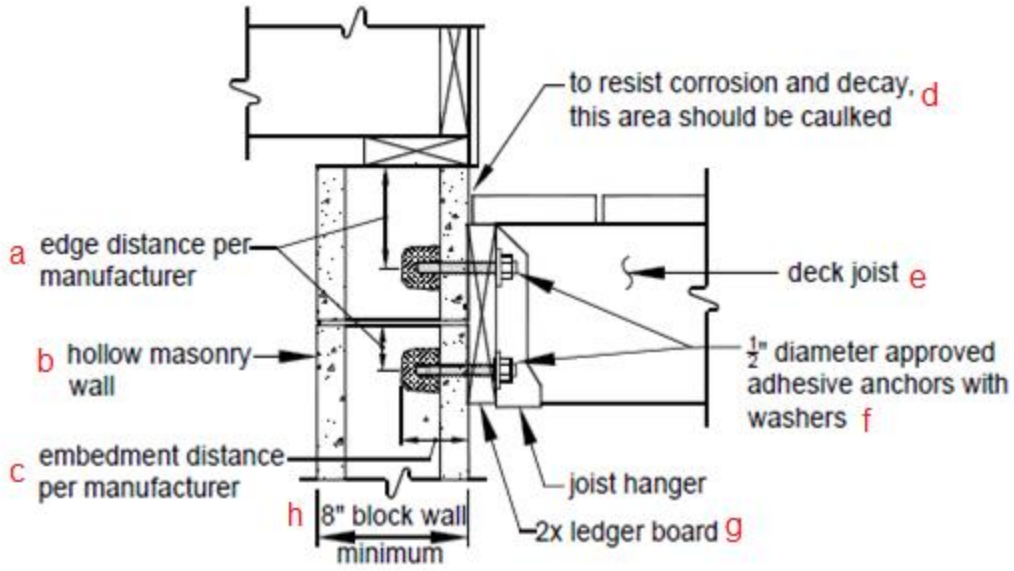

225. Resist corrosion and decay is represented by letter ___.
a. a
b. b
c. c
d. d

226. Embedment distance per manufacturer is represented by letter ___?
a. a
b. b
c. c
d. d

227. Hollow masonry wall is represented by letter ___.
a. a
b. b
c. c
d. d

228. Edge distance per manufacturer is represented by letter ___.
a. a
b. b
c. c
d. d

229. Deck joist is represented by letter ___.
a. e

b. f
c. g
d. h

230. 2x ledger board is represented by letter ___.
a. e
b. f
c. g
d. h

231. ½" diameter approved adhesive anchors with washer is represented by letter ___.
a. e
b. f
c. g
d. h

232. 8" minimum block wall is represented by letter ___.
a. e
b. f
c. g
d. h

Prohibited ledger attachments. Attaching a ledger board to or through an exterior veneer such as brick or stone, or to or through a masonry chimney, or to a house overhang – as shown below – are prohibited. In such cases, the deck must be free-standing, as addressed in section 10.

Figure 14
d **PROHIBITED LEDGER ATTACHMENTS**

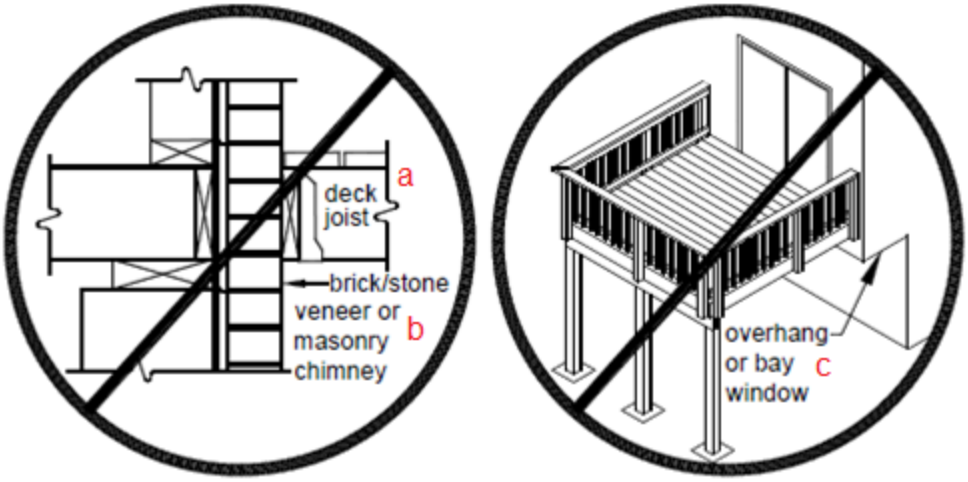

233. Attaching a ledger board to or through an exterior veneer such as _____– as shown above – are prohibited.
a. brick
b. stone
c. both a & b
d. none of the above

234. Attaching a ledger board to or through an exterior veneer such as _____– as shown above – are prohibited.
a. through a masonry chimney
b. house overhang
c. above a bay window

d. all of the above

SECTION 9: LEDGER-BOARD FASTENERS

General requirements. Ledger board fasteners must be installed in accordance with this section. Placement and spacing must be in accordance with Figure 15 and Table 6. Only the fastener types listed here are approved for use; lead anchors are prohibited. Adequacy of connections may be verified by local inspectors.

Figure 15
LEDGER BOARD FASTENER SPACING AND CLEARANCES

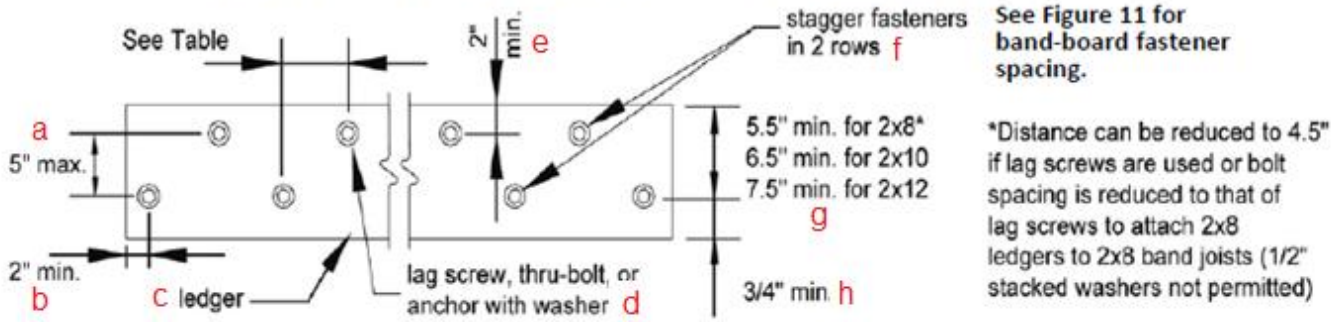

235. Ledger board fasteners. Lead anchors are prohibited.
    a. true
    b. false
236. Adequacy of connections _____ be verified by local inspectors.
    a. shall
    b. must
    c. might
    d. may
237. The letter g above represents _____.
    a. 5.5” minimum for 2 x 8
    b. 6.5” minimum for 2 x 10
    c. 7.5” minimum for 2 x 12
    d. all of the above
238. The letter d above represents _____.
    a. lag screw
    b. thru-bolt
    c. anchor with washer
    d. all of the above
239. The letter h above represents _____.
    a. 2” minimum
    b. 5” maximum
    c. ¾” minimum
    d. staggered fasteners in 2 rows
240. The letter b above represents _____.
    a. 2” minimum
    b. 5” maximum
    c. ¾” minimum
    d. staggered fasteners in 2 rows
241. The letter a above represents _____.
    a. 2” minimum
    b. 5” maximum

c. ¾" minimum
d. staggered fasteners in 2 rows

242. The letter f above represents _____.
a. 2" minimum
b. 5" maximum
c. ¾" minimum
d. staggered fasteners in 2 rows

Table 6
LEDGER BOARD FASTENER SPACING, ON CENTER[1,2,3]

Fastener	Band Board	Joist Span: less than or equal to						
		6'	8'	10'	12'	14'	16'	18'
Lag screws	1" EWP	24"	18"	14"	12"	10"	9"	8"
	$1^1/_8$" EWP	28"	21"	16"	14"	12"	10"	9"
	2x Lumber	30"	23"	18"	15"	13"	11"	10"
Through-Bolts	1" EWP	24"	18"	14"	12"	10"	9"	8"
	$1^1/_8$" EWP	28"	21"	16"	14"	12"	10"	9"
	2x Lumber	36"	36"	34"	29"	24"	21"	19"
Through-Bolts with ½" stacked washers[4,5]	2x Lumber	36"	36"	29"	24"	21"	18"	16"
Adhesive anchors	———	32"	32"	32"	24"	24"	16"	16"

1. These values are valid for deck ledgers consisting of douglas fir/larch, hem/fir, or southern pine; and for band boards consisting of douglas fir-larch, hem-fir, spruce-pine-fir, southern pine, or engineered wood product (EWP).
2. Where solid-sawn pressure-preservative-treated deck ledgers are attached to engineered wood products (minimum 1" thick wood structural panel band joist or structural composite lumber including laminated veneer lumber), the ledger attachment must be designed in accordance with accepted engineering practice. These tabulated values are in accordance with that practice and are based on 300 lbs and 350 lbs for 1" and 11/8" EWP rim board, respectively.
3. The thickness of the sheathing over the band board must not exceed 15/32".
4 The maximum gap between the face of the ledger board and face of the wall sheathing is ½".
5. Wood structural panel sheathing, gypsum board sheathing, or foam sheathing is permitted between the ledger board and the band board. Stacked washers are permitted in combination with wood structural panel sheathing, but are not permitted in combination with gypsum board or foam sheathing. The maximum distance between the face of the ledger board and the face of the band board is 1".

243. Fasteners included on Table 6 are _____.
a. adhesive anchors
b. through-bolts
c. lag screws
d. all of the above

244. Referencing Table 6, adhesive anchors are _____.
a. prohibited
b. allowed
c. none of the above
d. both a or b

245. Ledger board fastener spacing for a lag screw, 1" EWP, joist span of 14', would be ____.
a. 8"
b. 9"

c. 10”
d. 12”

246. Wood structural _____ is permitted between the ledger board and the band board.
a. panel sheathing
b. gypsum board sheathing
c. foam sheathing
d. all of the above

247. The maximum distance between the face of the ledger board and the face of the band board is __".
a. 3/4
b. 7/8
c. 15/32
d. 1

248. The thickness of the sheathing over the band board must not exceed _____".
a. 3/4
b. 7/8
c. 15/32
d. 1

Through-bolts. Through-bolts must have a diameter of ½ inch. Pilot holes for through-bolts must be 17/32 to 9/16 inches in diameter. Through-bolts must be equipped with washers at the bolt head and nut. Bolts should be tightened 6 to 12 months after construction due to drying and wood shrinkage.
Expansion anchors. Expansion or adhesive anchors must be used for attaching a ledger board to a concrete or solid masonry wall, as shown in Figure 12. The bolt or threaded rod of expansion anchors must have a diameter of ½ inch, which in some cases may result in needing a 5/8-inch-diameter anchor. Expansion anchors must be installed in accordance with the manufacturer’s instructions and must be equipped with washers.
Adhesive anchors. Approved adhesive anchors with a ½-inch-diameter threaded rod must be used for attaching a ledger board to hollow masonry, as shown in Figure 13. Examples of approved adhesive anchors include the Epcon Acrylic 7 by ITW Ramset/Red Head, and the HY-20 by Hilti. Adhesive anchors are also permitted with concrete or solid masonry installations. Adhesive anchors must be installed in accordance with the manufacturer’s instructions and must be equipped with washers. Adhesive cartridges should remain on the jobsite for inspector verification.
Lag screws. The diameter, length, and shank of lag screws must comply with Figure 16. Lag screws must be equipped with washers and be installed in the following sequence:
1. Drill a ½-inch-diameter hole in the ledger board and a 5/16-inch-diameter pilot hole into the solid-connection material of the existing house.
2. Insert the lag screw through the ledger board and into the pilot hole by turning. Do not drive with a hammer. Use soap or a wood-compatible lubricant if needed to facilitate tightening.
3. Tighten each lag screw snugly, but do not over-tighten so as to cause wood damage.

249. Expansion or adhesive anchors must be used for attaching a ledger board to a concrete or solid masonry wall defines:
a. Through-bolts.
b. Adhesive anchors
c. Lag screws
d. Expansion anchors

250. Approved adhesive anchors with a ½-inch-diameter threaded rod must be used for attaching a ledger board to hollow masonry defines:
a. Through-bolts.
b. Adhesive anchors

c. Lag screws
d. Expansion anchors

251. Through-bolts must have a diameter of ½ inch. Pilot holes for through-bolts must be 17/32 to 9/16 inches in diameter defines:
a. Through-bolts
b. Adhesive anchors
c. Lag screws
d. Expansion anchors

252. The diameter, length, and shank of lag screws must comply with Figure 16. Lag screws must be equipped with washers defines:
a. Through-bolts
b. Adhesive anchors
c. Lag screws
d. Expansion anchors

Figure 16
LAG SCREW

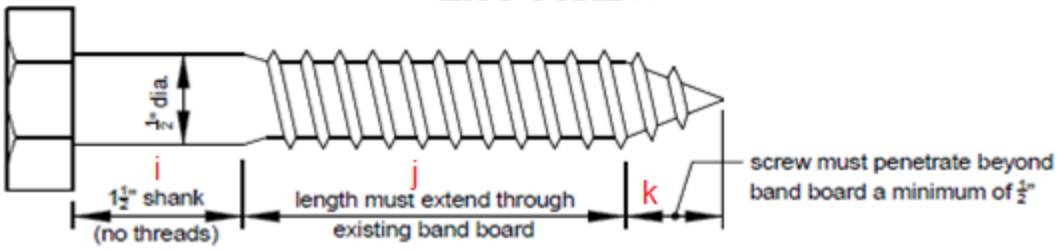

253. The letter k represents _____.
a. 1.5" shank with no threads
b. length must extend through existing band board
c. screw must penetrate beyond band board a minimum of ½"

254. The letter j represents _____.
a. 1.5" shank with no threads
b. length must extend through existing band board
c. screw must penetrate beyond band board a minimum of ½"

255. The letter i represents _____.
a. 1.5" shank with no threads
b. length must extend through existing band board
c. screw must penetrate beyond band board a minimum of ½"

SECTION 10: FREE-STANDING DECKS

A deck that is free-standing does not utilize the exterior wall of the existing house to support vertical loads. Instead, an additional beam is provided at or offset from the existing house wall, as shown in Figure 17. If the edge of a deck footing is closer than 5 feet to an existing exterior house wall, the footing must bear at the same elevation as the existing wall footing as shown in Figure 17. For a house with a basement, a cylindrical footing (caisson) is recommended to minimize required excavation at the basement wall.

256. If the edge of a deck footing is closer than ___ feet to an existing exterior house wall, the footing must bear at the same elevation as the existing wall footing
a. 3
b. 4
c. 5

d. 6

257. A deck that is free-standing ____ utilize the exterior wall of the existing house to support vertical loads.

a. may
b. does
c. does not
d. none of the above

Figure 17
FREE-STANDING DECK

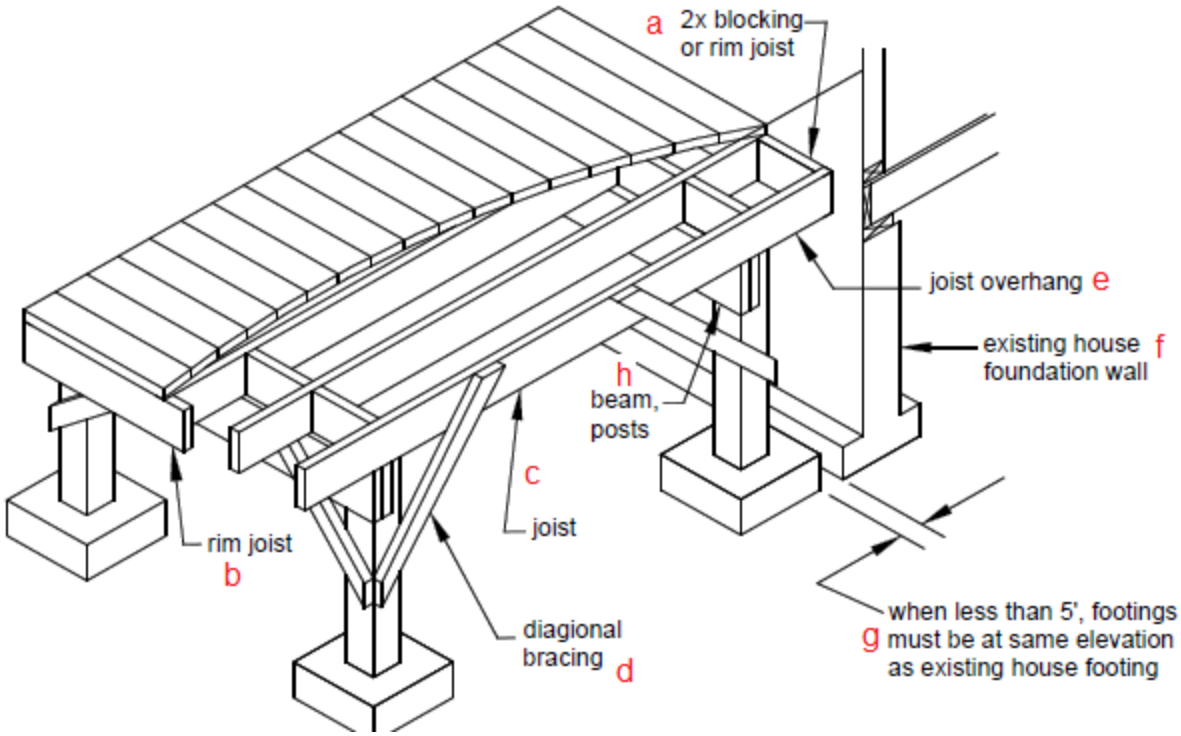

258. The letter d represents _____.

a. diagonal bracing
b. joist overhang
c. when less than 5', footing must be at the same elevation as the existing house footing
d. beam posts

259. The letter g represents _____.

a. diagonal bracing
b. joist overhang
c. when less than 5', footing must be at the same elevation as the existing house footing
d. beam posts

260. The letter h represents _____.

a. diagonal bracing
b. joist overhang
c. when less than 5', footing must be at the same elevation as the existing house footing
d. beam posts

261. The letter e represents _____.

a. diagonal bracing
b. joist overhang
c. when less than 5', footing must be at the same elevation as the existing house footing

d. beam posts

SECTION 11: LATERAL SUPPORT

A deck that is more than 24 inches above grade must resist lateral loads in accordance with the following: **Diagonal Bracing.** Provide diagonal bracing both parallel and perpendicular to the beam at each post as shown in Figure 18. Where parallel to the beam, the bracing must be bolted to the post at one end and to the beam at the other. Where perpendicular to the beam, the bracing must be bolted to the post at one end and to a joist or blocking between joists at the other. Where a joist does not align with the bracing location, provide blocking between the adjacent joists. **Exceptions:** Bracing is not required perpendicular to the house for a deck that is attached to the house with both a ledger board under sections 8 and 9 and the connection specified in either Figure 19 or 20. For a free-standing deck that is attached to the house as specified in Figure 21, bracing parallel to the house may be omitted at the beam adjacent to the house. All bracing may be omitted for a deck which is attached to the house in accordance with sections 8 and 9 or Figures 21 and which has all of its decking installed at a 45 degree angle to the deck joists.

262. A deck that is more than 24 inches above grade must resist lateral loads in accordance with the following: _____, the bracing must be bolted to the post at one end and to the beam at the other.
- a. Where a joist does not align with the bracing location
- b. Where perpendicular to the beam
- c. Where parallel to the beam
- d. all of the above

263. A deck that is more than 24 inches above grade must resist lateral loads in accordance with the following: _____, the bracing must be bolted to the post at one end and to a joist or blocking between joists at the other.
- a. Where a joist does not align with the bracing location
- b. Where perpendicular to the beam
- c. Where parallel to the beam
- d. all of the above

264. A deck that is more than 24 inches above grade must resist lateral loads in accordance with the following: _____, provide blocking between the adjacent joists.
- a. Where a joist does not align with the bracing location
- b. Where perpendicular to the beam
- c. Where parallel to the beam
- d. all of the above

265. For a free-standing deck that is than 24 inches above grade and attached to the house as specified in Figure 21, bracing parallel to the house may be omitted at the beam _____.
- a. front and back
- b. front only
- c. adjacent to the house
- d. adjacent to the house and front of deck

266. All bracing may be omitted for a free-standing deck that is than 24 inches above grade which is attached to the house in accordance with sections 8 and 9 or Figures 21 and which has all of its decking installed _____ to the deck joists.
- a. perpendicular
- b. parallel
- c. at a 45 degree angle
- d. none of the above

Figure 18
DIAGONAL BRACING REQUIREMENTS

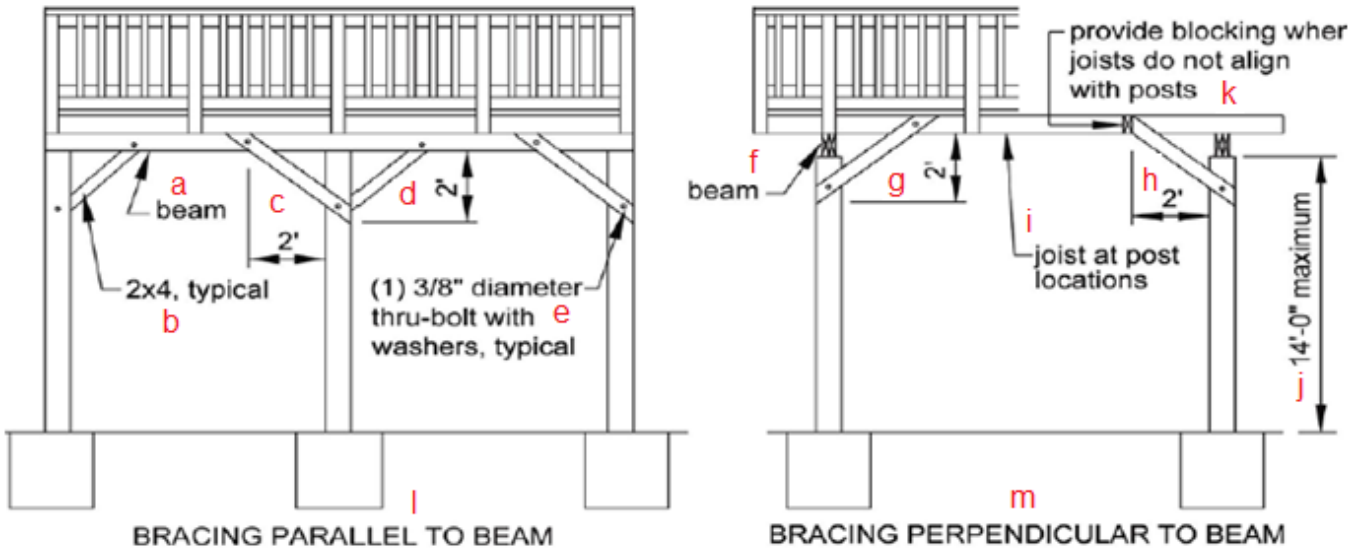

267. The letter m represents _____.
   a. provide blocking where joist do not align with posts
   b. (1) 3/8" diameter thru-bolt with washers
   c. bracing parallel to beam
   d. bracing perpendicular to beam

268. The letter k represents _____.
   a. provide blocking where joist do not align with posts
   b. (1) 3/8" diameter thru-bolt with washers
   c. bracing parallel to beam
   d. bracing perpendicular to beam

269. The letter e represents _____.
   a. provide blocking where joist do not align with posts
   b. (1) 3/8" diameter thru-bolt with washers
   c. bracing parallel to beam
   d. bracing perpendicular to beam

270. The letter l represents _____.
   a. provide blocking where joist do not align with posts
   b. (1) 3/8" diameter thru-bolt with washers
   c. bracing parallel to beam
   d. bracing perpendicular to beam

Figure 19
TENSION-TIE CONNECTION, WITH LEDGER BOARD

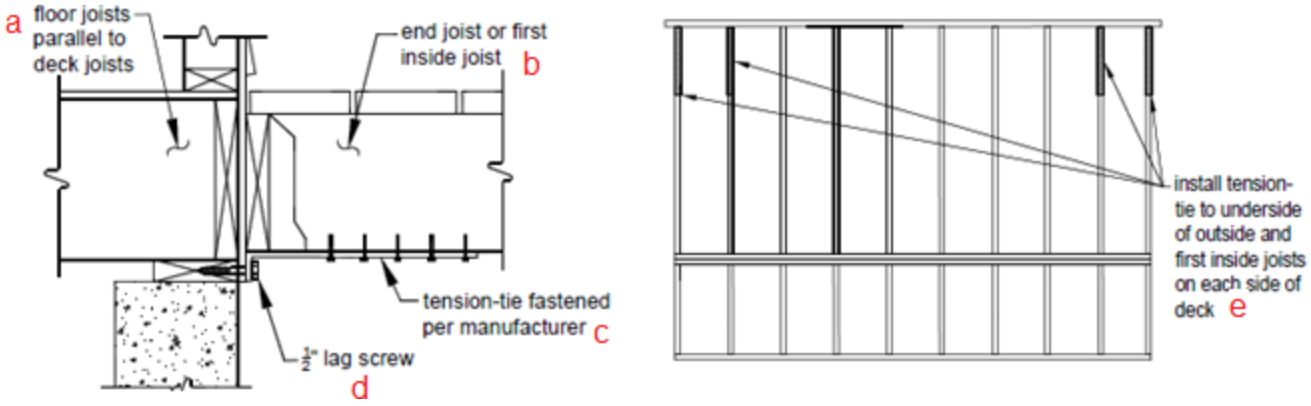

271. The letter d represents _____.
    a. floor joist parallel to deck joists
    b. tension-tie fastened per manufacturer
    c. install tension tie to underside of outside and first inside joists on each side of deck.
    d. 1/2" lag screw
272. The letter c represents _____.
    a. floor joist parallel to deck joists
    b. tension-tie fastened per manufacturer
    c. install tension tie to underside of outside and first inside joists on each side of deck.
    d. 1/2" lag screw
273. The letter e represents _____.
    a. floor joist parallel to deck joists
    b. tension-tie fastened per manufacturer
    c. install tension tie to underside of outside and first inside joists on each side of deck.
    d. 1/2" lag screw
274. The letter a represents _____.
    a. floor joist parallel to deck joists
    b. tension-tie fastened per manufacturer
    c. install tension tie to underside of outside and first inside joists on each side of deck.
    d. 1/2" lag screw

Tension-tie requirements. Tension ties, if used instead of perpendicular bracing as described above, must comply with all of the following, but are not permitted for free-standing decks:

1. The deck joists and floor joists must be parallel.
2. At least 4 ties must be installed, at the end joist and first inside joist at each end of the deck as shown in Figure 19. A set of tension-ties must be installed for each structurally independent section of a multi-level deck.
3. Approved tension-ties include the LTS19 from USP or LTT19 from Simpson Strong-Tie.
4. The minimum capacity of each tension-tie is 750 pounds.
5. Tension ties are not available in a G-185 zinc coating, therefore a barrier membrane must separate the tension tie and the preservative-treated joist. The barrier membrane must be recommended for this location by its manufacturer.
6. Tension-ties must be attached to the underside of the joists in accordance with the manufacturer's instructions. Tension-ties must be attached to the exterior wall with lag screws as shown in Figure 19. Lag screws must penetrate a minimum of 3 inches into the sill plate or top plate of a wood-framed wall.

7. Where attaching to a concrete wall, lags screws may be replaced with adhesive or expansion anchors and a ½-inch threaded rod, with a withdrawal capacity of at least 750 pounds. The anchor must be installed in accordance with the manufacturer's instructions.

Hold-down tension devices. Hold-down tension devices, if used instead of perpendicular bracing as described above, must be provided in at least two locations per deck, and each device must have an allowable-stress-design capacity of at least 1,500 pounds.

Free-standing deck – attachment to house. Attach the deck's rim joist to the existing house exterior wall as shown in Figure 21 for a free-standing deck, if diagonal bracing parallel to the house is omitted, as described above. The wall must be sheathed with minimum 3/8-inch wood structural panel sheathing. Use lag screws or through-bolts if fastening to an existing band joist or wall stud; and use expansion or adhesive anchors if fastening to concrete or masonry. Do not attach to brick veneers. Verify this condition in the field prior to utilizing this method. Fasteners must be 16 inches on center and staggered in 2 rows. Flashing over the rim joist is required and must be installed in accordance with the flashing provisions in section 8.

275. Tension ties are permitted for free-standing decks.
- a. true
- b. false

276. Tension ties, if used instead of perpendicular bracing as described above, must comply with all of the following:
- a. Tension ties are not available in a G-185 zinc coating, therefore a barrier membrane must separate the tension tie and the preservative-treated joist. The barrier membrane must be recommended for this location by its manufacturer.
- b. Tension-ties must be attached to the underside of the joists in accordance with the manufacturer's instructions. Tension-ties must be attached to the exterior wall with lag screws as shown in Figure 19. Lag screws must penetrate a minimum of 3 inches into the sill plate or top plate of a wood-framed wall.
- c. Where attaching to a concrete wall, lags screws may be replaced with adhesive or expansion anchors and a ½-inch threaded rod, with a withdrawal capacity of at least 750 pounds. The anchor must be installed in accordance with the manufacturer's instructions.
- d. all of the above

277. Tension ties, if used instead of perpendicular bracing as described above, must comply with all of the following:
- a. The deck joists and floor joists must be perpendicular.
- b. At least 14 ties must be installed, at the end joist and first inside joist at each end of the deck as shown in Figure 1. A set of tension-ties must be installed for each structurally independent section of a multi-level deck < 24" to grade.
- c. Store bought tension-ties include the LTS19 from USP or LTT19 from Simpson Strong-Tie & the minimum capacity of each tension-tie is 175 pounds.
- d. none of the above

278. Hold-down tension devices, if used instead of perpendicular bracing as described above, must be provided in at least ____ locations per deck,
- a. 1
- b. 2
- c. 3
- d. 4

279. Hold-down tension devices, if used instead of perpendicular bracing as described above, each device must have an allowable-stress-design capacity of at least _____ pounds.
- a. 150

b. 1500
c. 15000
d. none of the above

Figure 21
ATTACHMENT OF FREE-STANDING DECK TO HOUSE FOR LATERAL SUPPORT

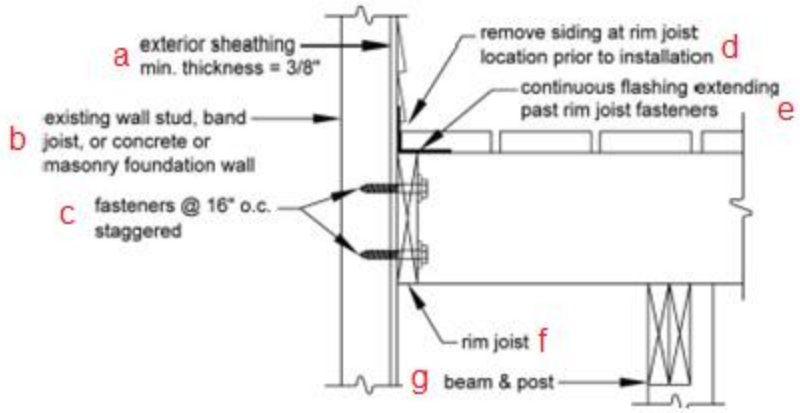

280. The letter e represents _____.
a. exterior sheathing minimum thickness = 3/8”
b. fasteners @ 16” O. C. staggered
c. remove siding at rim joist location prior to installation
d. continuous flashing extending past the rim joist fasteners

281. The letter a represents _____.
a. exterior sheathing minimum thickness = 3/8”
b. fasteners @ 16” O. C. staggered
c. remove siding at rim joist location prior to installation
d. continuous flashing extending past the rim joist fasteners

282. The letter c represents _____.
a. exterior sheathing minimum thickness = 3/8”
b. fasteners @ 16” O. C. staggered
c. remove siding at rim joist location prior to installation
d. continuous flashing extending past the rim joist fasteners

283. The letter d represents _____.
a. exterior sheathing minimum thickness = 3/8”
b. fasteners @ 16” O. C. staggered
c. remove siding at rim joist location prior to installation
d. continuous flashing extending past the rim joist fasteners

---

SECTION 12: DECKING

All decking materials must be wood or a wood-plastic composite and must comply with all of the following:

1. Wood decking must be 2x4s, 2x6s, or five-quarter span-rated decking boards. Wood-plastic-composite sizes must be in accordance with the manufacturer’s instructions. Plastic decking may be used if it is approved by a professional testing organization for supporting a live load of 40 psf and is installed according to the manufacturer’s instructions.

2. Decking must be attached in accordance with Figure 22, and may be placed at an angle of 45 to 90 degrees to the joists unless disallowed in the manufacturer’s instructions. If the decking is wet, place it with no gap so that after drying, a ⅛-inch gap is created.

3. Decking may overhang a joist by up to 3 inches unless disallowed in the manufacturer's instructions.
4. The center-to-center joist spacing may be up to 24 inches for wood decking, but may not exceed 16 inches for wood-plastic-composite decking unless specified otherwise by the manufacturer.
5. Each wood decking member must bear on a minimum of 4 joists or intermediate blocking between joists.
6. Placement and attachment of wood-plastic composites must be in accordance with the manufacturer's instructions.
7. Attach the decking to the rim joist in accordance with Figure 23.

Figure 22
TYPICAL DECKING

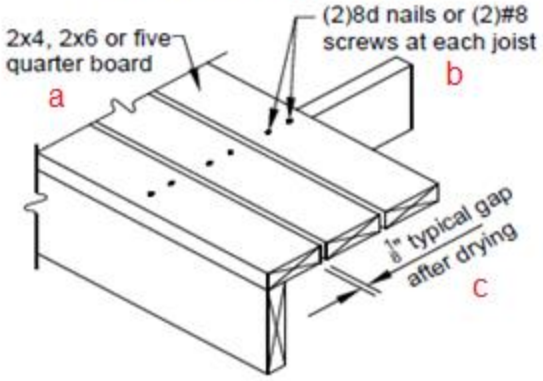

Figure 23
RIM JOIST CONNECTION

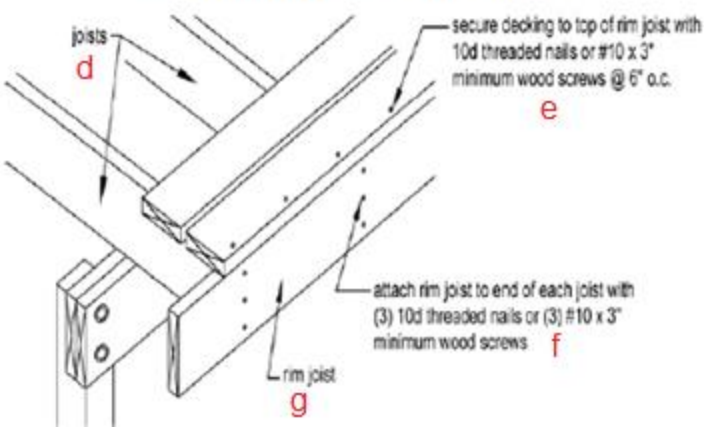

284. The letter c represents _____.
   a. 1/8" typical gap after drying
   b. (2) 8d or (2) #8 screws at each joist
   c. secure decking to top of rim joist with 10d threaded nails or #10 x 3" min. wood screws 6" o.c.
   d. attached rim to end of each joist with (3) 10d threaded or (3) #10 x 3" min. wood screws

285. The letter b represents _____.
   a. 1/8" typical gap after drying
   b. (2) 8d or (2) #8 screws at each joist
   c. secure decking to top of rim joist with 10d threaded nails or #10 x 3" min. wood screws 6" o.c.
   d. attached rim to end of each joist with (3) 10d threaded or (3) #10 x 3" min. wood screws

286. The letter f represents _____.
   a. 1/8" typical gap after drying
   b. (2) 8d or (2) #8 screws at each joist
   c. secure decking to top of rim joist with 10d threaded nails or #10 x 3" min. wood screws 6" o.c.
   d. attached rim to end of each joist with (3) 10d threaded or (3) #10 x 3" min. wood screws

287. The letter e represents _____.
   a. 1/8" typical gap after drying
   b. (2) 8d or (2) #8 screws at each joist
   c. secure decking to top of rim joist with 10d threaded nails or #10 x 3" min. wood screws 6" o.c.
   d. attached rim to end of each joist with (3) 10d threaded or (3) #10 x 3" min. wood screws

288. Decking may overhang a joist by up to ___" unless disallowed in the manufacturer's instructions.
   a. 2
   b. 3
   c. 4
   d. none of the above

289. The center-to-center joist spacing may be up to ____ inches for wood decking.
   a. 16

b. 24
c. 32
d. all of the above

290. The center-to-center joist spacing may not exceed ___ inches for wood-plastic-composite decking unless specified otherwise by the manufacturer.
a. 16
b. 24
c. 32
d. all of the above

291. Each wood decking member must bear on a minimum of ___ joists or intermediate blocking between joists.
a. 2
b. 3
c. 4
d. none of the above

292. Plastic decking may be used if it is approved by a professional testing organization for supporting a live load of ___ psf and is installed according to the manufacturer's instructions.
a. 20
b. 30
c. 40
d. 50

293. Decking may be placed at an angle of ____ degrees to the joists unless disallowed in the manufacturer's instructions.
a. 45 to 60
b. 60 to 90
c. 45 to 90
d. none of the above

294. If the decking is wet, place it with no gap so that after drying, a ___-inch gap is created.
a. 1/16
b. 1/8
c. 3/16
d. 1/4

SECTION 13: GUARDRAILS AND POSTS

All open sides of a deck area that is more than 24 inches above grade – at any point within 36 inches beyond the edge of the deck – must have a guardrail that complies with Figure 24 and with all of the following:

1. Every opening between balusters, between a baluster and a post, and between the bottom 2x4 and the deck must prevent the through-passage of a sphere having a diameter of 4 3/8 inches, when applying a force of 4 pounds. Wet lumber must be spaced such that when shrinkage due to drying occurs, a compliant opening is maintained.
2. Rope, cable, or a similar non-rigid material may be used instead of balusters if it is strung with maximum openings of 3½ inches and with vertical supports no more than 4 feet apart.
3. The guardrail and posts must withstand a 200-pound load applied in any direction.
4. Guardrail-infill components, such as balusters and panel fillers, must withstand a horizontally applied, perpendicular load of 50 pounds on any one-foot-square area.
5. Wood-plastic composites of equivalent dimensions may be substituted for the guardrail cap and infill elements shown in Figure 24 if the manufacturer's instructions permit this use.

295. The guardrail and posts must withstand a ____-pound load applied in any direction.

a. 100
b. 150
c. 200
d. 250

296. Rope, cable, or a similar non-rigid material may be used instead of balusters if it is strung with maximum openings of ____ inches.

a. 3
b. 3.25
c. 3.5
d. 4

297. Rope, cable, or a similar non-rigid material may be used instead of balusters if the vertical supports no more than ___ feet apart.

a. 3
b. 4
c. 5
d. 6

298. Every opening between balusters, between a baluster and a post, and between the bottom 2x4 and the deck must prevent the through-passage of a sphere having a diameter of __ inches,

a. 3
b. 3.25
c. 3.5
d. 4 3/8

299. All open sides of a deck area that is more than 24 inches above grade – at any point within ___ inches beyond the edge of the deck – must have a guardrail

a. 12
b. 24
c. 36
d. 48

300. Every opening between balusters, between a baluster and a post, and between the bottom 2x4 and the deck must prevent the through-passage of a sphere when applying a force of __ pounds.

a. 3
b. 3.25
c. 3.5
d. 4

301. Wet lumber must be spaced such that when shrinkage due to drying occurs, a compliant opening is maintained.

a. true
b. false

Figure 24
GUARDRAILS

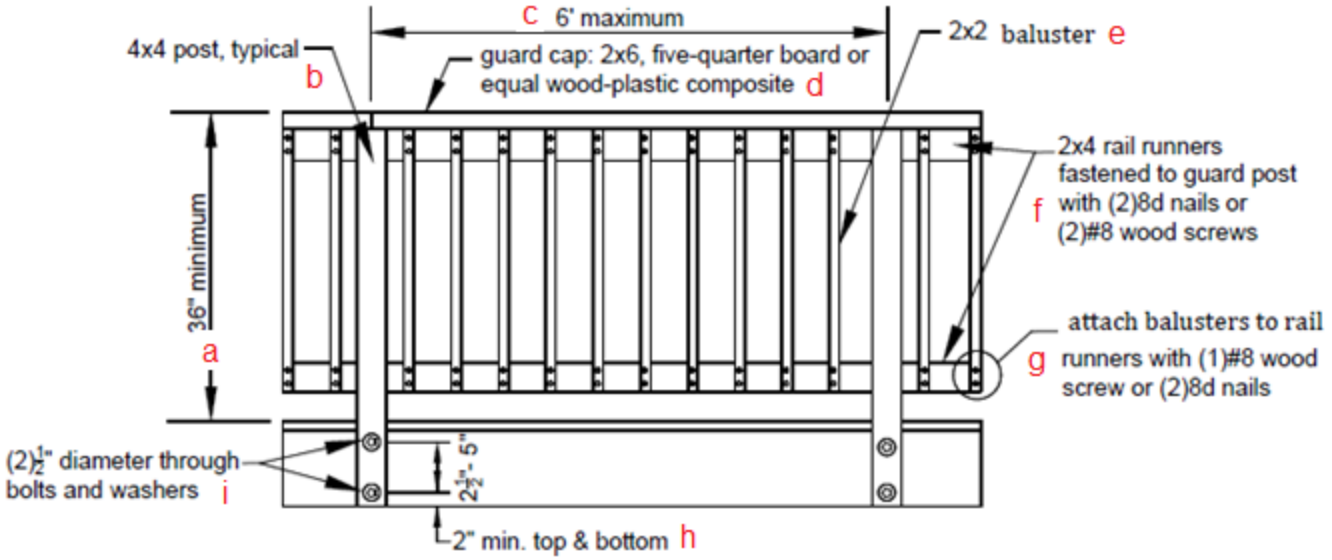

302. The letter h represents _____.
    a. 6’ maximum
    b. 36” minimum
    c. 2” minimum top and bottom
    d. (2) 1/2” diameter through bolts and washers
303. The letter c represents _____.
    a. 6’ maximum
    b. 36” minimum
    c. 2” minimum top and bottom
    d. (2) 1/2” diameter through bolts and washers
304. The letter i represents _____.
    a. 6’ maximum
    b. 36” minimum
    c. 2” minimum top and bottom
    d. (2) 1/2” diameter through bolts and washers
305. The letter a represents _____.
    a. 6’ maximum
    b. 36” minimum
    c. 2” minimum top and bottom
    d. (2) 1/2” diameter through bolts and washers

Guard posts. Guard posts must be attached to the deck structure in accordance with all of the following:
1. Notching guard posts, as shown in Figure 25, is prohibited.
2. Hold-down anchors, as shown in Figures 26 and 27 must be used to attach the guard post to the end joist and rim joist, respectively.
3. Hold-down anchors must have a minimum capacity of 1,800 pounds.
4. Guard posts may be attached to either side of the end joist or rim joist.
5. Bolt holes for a post must be at least 2 inches from the wood edge, at least 2½ inches apart, and no more than 5 inches apart.

306. Guard posts must be attached to the deck structure in accordance with the following:
    a. Hold-down anchors must have a minimum capacity of 1,800 pounds.

b. Guard posts may be attached to either side of the end joist or rim joist.
c. Bolt holes for a post must be at least 2 inches from the wood edge, at least 2½ inches apart, and no more than 5 inches apart.
d. all of the above

Figure 25
POST NOTCHING PROHIBITED

Figure 26
GUARD POST TO END JOIST

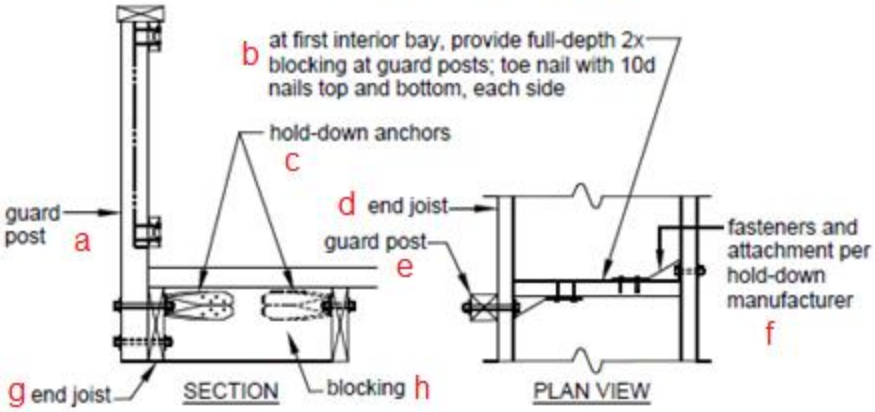

307. The letter f represents _____.
a. hold-down anchors
b. at first bay provide full depth 2x blocking at guard posts
c. fasteners and attachment per hold-down manufacturer
d. do not notch

308. The letter i represents _____.
a. hold-down anchors
b. at first bay provide full depth 2x blocking at guard posts
c. fasteners and attachment per hold-down manufacturer
d. do not notch

309. The letter b represents _____.
a. hold-down anchors
b. at first bay provide full depth 2x blocking at guard posts
c. fasteners and attachment per hold-down manufacturer
d. do not notch

310. The letter c represents _____.
a. hold-down anchors
b. at first bay provide full depth 2x blocking at guard posts
c. fasteners and attachment per hold-down manufacturer
d. do not notch

Figure 26
GUARD POST TO RIM JOIST

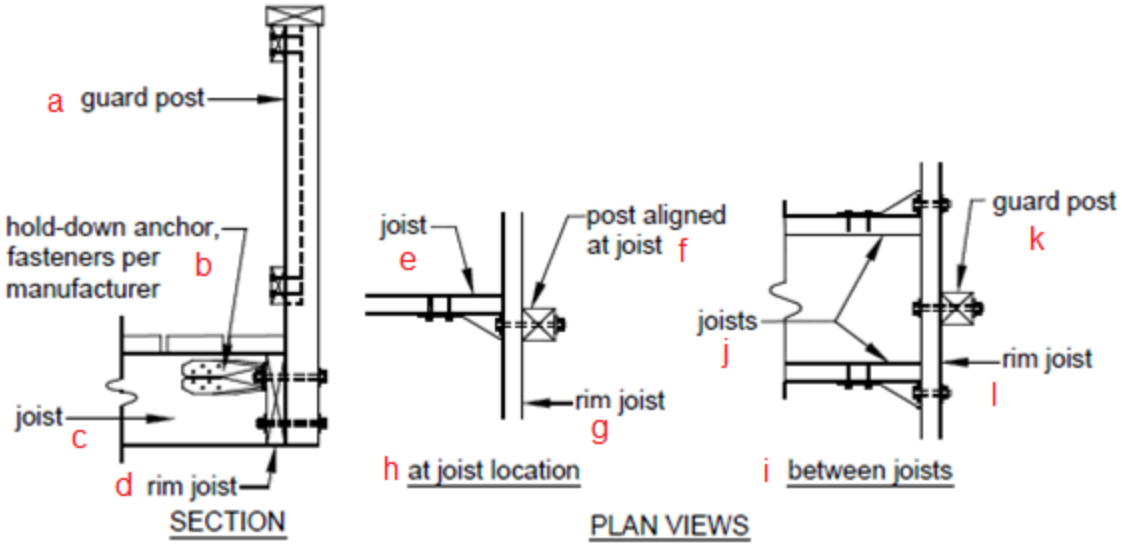

SECTION 14: STAIRS

Stair dimensions. Stair dimensions must comply with all of the following:

1. The minimum width of a stairway is 36 inches.
2. Handrails and associated trim may project a maximum of 4½ inches into the required width at each side of the stairway. The minimum clear width at and below the handrail, including at treads and landings, cannot be less than 31½ inches where a handrail is installed on one side, and 27 inches where handrails are provided on both sides.
3. Stair geometry and openings must be as shown in Figure 27.
4. Within a stairway flight, the largest tread depth may not exceed the smallest tread depth by more than 3/8 inch, and the largest riser height may not exceed the smallest riser height by more than 3/8 inch.
5. If the total vertical height of a stairway exceeds 12 feet, an intermediate landing is required and must be constructed as a free-standing deck with flush beams, and with posts as shown in Figure 29.
6. Any landing width must equal or exceed the total width of the stairway it serves.

311. The minimum clear width at and below the handrail, including at treads and landings, cannot be less than ___ inches where a handrail is installed on one side
    a. 36
    b. 4.5
    c. 31.5
    d. 27

312. The minimum clear width at and below the handrail, including at treads and landings, cannot be less than ____ inches where handrails are provided on both sides.
    a. 4.5
    b. 28
    c. 31.5
    d. 27

313. Handrails and associated trim may project a maximum of ___ inches into the required width at each side of the stairway.
    a. 4.5
    b. 36

c. 31.5
d. 27

314. The minimum width of a stairway is ___ inches.
a. 4.5
b. 36
c. 31.5
d. 27

315. Within a stairway flight, the largest tread depth may not exceed the smallest tread depth by more than ___ inch.
a. 1/8
b. 3/16
c. 1/4
d. 3/8

316 Within a stairway flight, the largest riser height may not exceed the smallest riser height by more than ___ inch.
a. 1/8
b. 3/16
c. 1/4
d. 3/8

317. If the total vertical height of a stairway exceeds ___ feet, an intermediate landing is required.
a. 10
b. 11
c. 12
d. 14

318. If the total vertical height of a stairway exceeds 12 feet, an intermediate landing must be constructed as a free-standing deck with _____.
a. flush beams
b. posts
c. both a & b
d. none of the above

319. Any landing width must _____ the total width of the stairway it serves.
a. less than
b. equal to
c. exceed
d. both b & c

Figure 27
TREADS AND RISERS

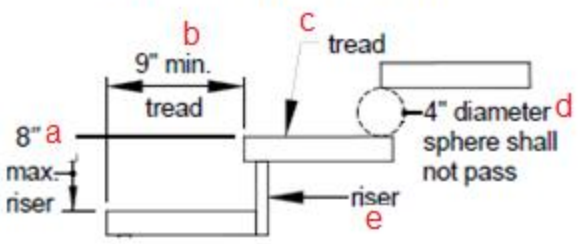

320. The letter c represents _____.
a. 9” minimum tread
b. 8” maximum rise
c. 4” diameter sphere shall not pass
d. tread

321. The letter b represents _____.
    a. 9” minimum tread
    b. 8” maximum rise
    c. 4” diameter sphere shall not pass
    d. tread
322. The letter d represents _____.
    a. 9” minimum tread
    b. 8” maximum rise
    c. 4” diameter sphere shall not pass
    d. tread
323. The letter a represents _____.
    a. 9” minimum tread
    b. 8” maximum rise
    c. 4” diameter sphere shall not pass
    d. tread

Stair stringers. Stringers must comply with all of the following:
1. Stringers must be sawn or solid 2x12s complying with the above tread and riser dimensions.
2. Stringers must be spaced no more than 18 inches on center.
3. Stringers must bear on footings and attach to the deck or a landing in accordance with Figure 28, except the footings must comply with Figure 29 if the vertical drop of the stairway is more than 24 inches. The depth to below frost must not be less than 48 inches.
4. Stringer-span length is measured using the horizontally projected distance between the centerlines of bearing at each end.
5. The span length of a stringer must not exceed 6 feet-0 inches, and the throat size of cut stringers must not be less than 5 inches, as shown in Figure 30.
Solid-stringer exception: Stringers for a stairway that has a width of 36 inches may have a horizontally projected span of up to 13 feet 3 inches if the stairway is framed solely with 2 solid stringers.
Intermediate-supported stringers: If the total stringer length exceeds the above dimensions, a 4x4 post may be provided to support the stringer and shorten its span length. The 4x4 post must be notched and bolted to the stringer in accordance with Figure 2. The post must bear over the middle one-third of a footing that is constructed in accordance with Figure 29 and is attached to the post as shown in Figure 2. An intermediate landing as described above may also be provided to shorten the stringer span.

324. Stringers must be spaced no more than ___ inches on center.
    a. 16
    b. 18
    c. 24
    d. 32
325. The span length of a stringer must not exceed ___ feet.
    a. 4
    b. 6
    c. 8
    d. 10
326. The throat size of cut stringers must not be less than ___ inches.
    a. 4
    b. 5
    c. 6
    d. 3

327. Stringer-span length is measured using the horizontally projected distance between the ___of bearing at each end.
    a. post edges
    b. centerlines of post edges
    c. centerlines
    d. mid-lines
328. Stringers must bear on footings and attach to the _____.
    a. deck
    b. landing
    c. both a & b
    d. none of the above
329. The stringer footing depth to below frost must not be less than ___ inches.
    a. 42
    b. 46
    c. 48
    d. no footing is required.
330. Stringers must be _____ 2x12s.
    a. sawn
    b. solid
    c. both a & b
    d. none of the above

Figure 28
STRINGER BEARING

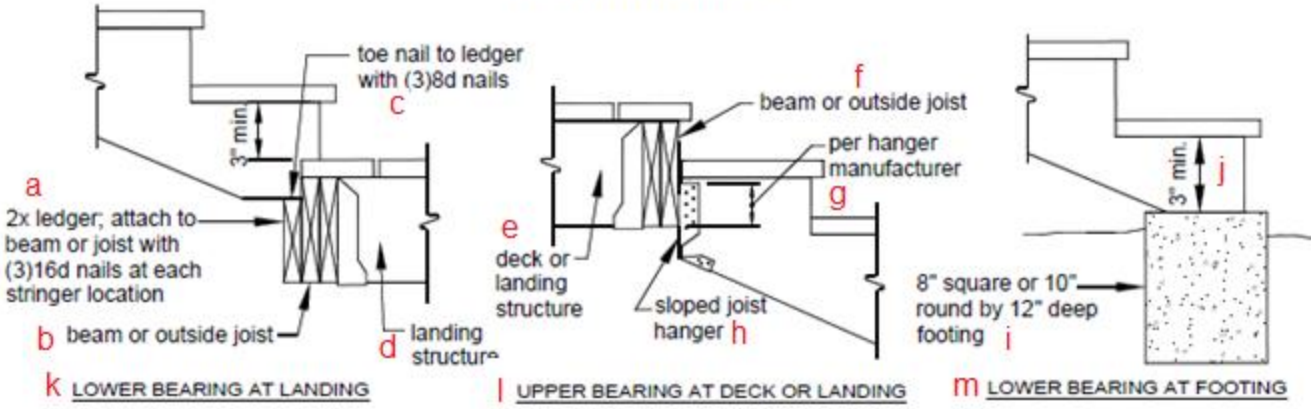

331. The letter h represents _____.
    a. sloped joist hanger
    b. lower bearing at landing
    c. upper bearing at deck or landing
    d. lower bearing at footing
332. The letter k represents _____.
    a. sloped joist hanger
    b. lower bearing at landing
    c. upper bearing at deck or landing
    d. lower bearing at footing
333. The letter l represents _____.
    a. sloped joist hanger
    b. lower bearing at landing
    c. upper bearing at deck or landing

d. lower bearing at footing

334. The letter m represents _____.
a. sloped joist hanger
b. lower bearing at landing
c. upper bearing at deck or landing
d. lower bearing at footing

Figure 29
STAIR OR POST FOOTING

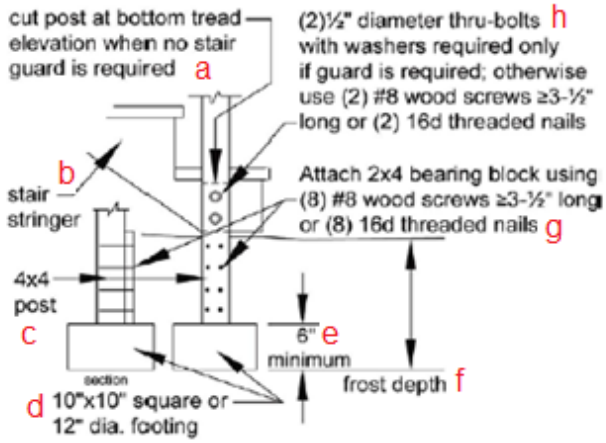

Figure 30
STRINGER SPAN LENGTH

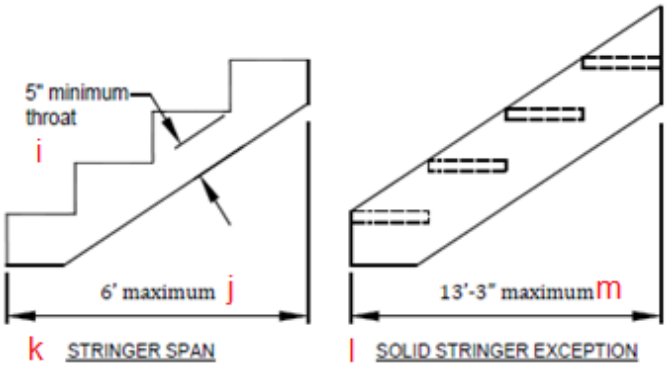

335. The letter i represents _____.
a. 6' maximum
b. 5" minimum
c. 13' 3" maximum
d. 6' minimum

336. The letter j represents _____.
a. 6' maximum
b. 5" minimum
c. 13' 3" maximum
d. 6" minimum

337. The letter e represents _____.
a. 6' maximum
b. 5" minimum
c. 13' 3" maximum
d. 6" minimum

338. The letter m represents _____.
a. 6' maximum
b. 5" minimum
c. 13' 3" maximum
d. 6" minimum

Tread and riser material. Treads and risers must comply with all of the following:

1. Tread material must be equivalent to the decking specified in section 12 and be attached in accordance with Figure 31, except wood-plastic composites must be attached in accordance with the manufacturer's instructions.
2. Stairs constructed using the solid-stringer exception noted above must have treads constructed of 2x wood material only and be attached in accordance with Figure 31.
3. Risers that are not open (as shown in Figure 27) must be framed with 1x lumber minimum or an equivalent wood-plastic composite.

Figure 31
STAIRWAY TREADS

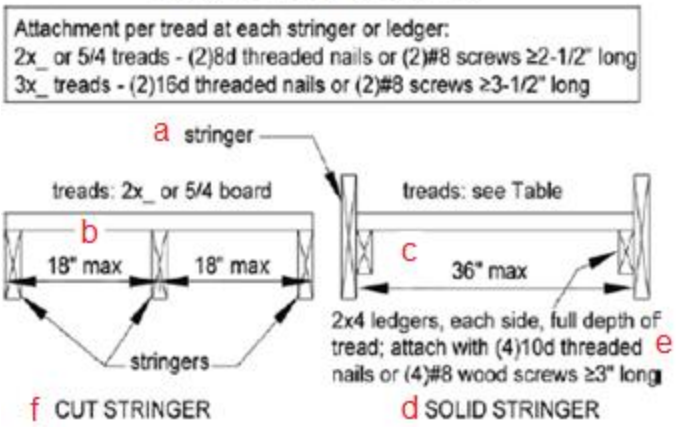

Table 7
MINIMUM TREAD SIZES[1]

Species	Cut Stringer	Solid Stringer
Douglas Fir/Larch, Hem/Fir, SPF[2]	2x4 or 5/4	2x8 or 3x4
Southern Pine	2x4 or 5/4	2x8
Redwood, Western Cedars, Ponderosa Pine[3], Red Pine[3]	2x4 or 5/4	2x10 or 3x4

[1] Assumes 300 lb concentrated load, L/288 deflection limit, No. 2 grade, and wet service conditions.
[2] Incising assumed for refractory species including Douglas fir-larch, hem-fir, and spruce-pine-fir.
[3] Design values based on northern species with no incising assumed.

339. The letter a represents _____.
    a. 18" maximum
    b. 36" maximum
    c. 2 x 4 ledgers, each side, full depth f ftread
    d. stringer
340. 339. The letter b represents _____.
    a. 18" maximum
    b. 36" maximum
    c. 2 x 4 ledgers, each side, full depth of tread
    d. stringer
341. 339. The letter c represents _____.
    a. 18" maximum
    b. 36" maximum
    c. 2 x 4 ledgers, each side, full depth of tread
    d. stringer
342. 339. The letter e represents _____.
    a. 18" maximum
    b. 36" maximum
    c. 2 x 4 ledgers, each side, full depth of tread
    d. stringer
343. Wood-plastic composites must be attached in accordance with the _____ instructions.
    a. inspector's
    b. supplier's
    c. manufacturer's
    d. lumber yard's
344. Footnote Table 7. Minimum tread size assumes _____ lb. concentrated load.
    a. 200
    b. 250
    c. 300
    d. none of the above

Stair guardrails. Guardrails must be provided on all open sides of stairs consisting of more than 3 risers. Stair guardrails must comply with section 13 and Figure 32.

Figure 32
STAIR GUARDRAILS

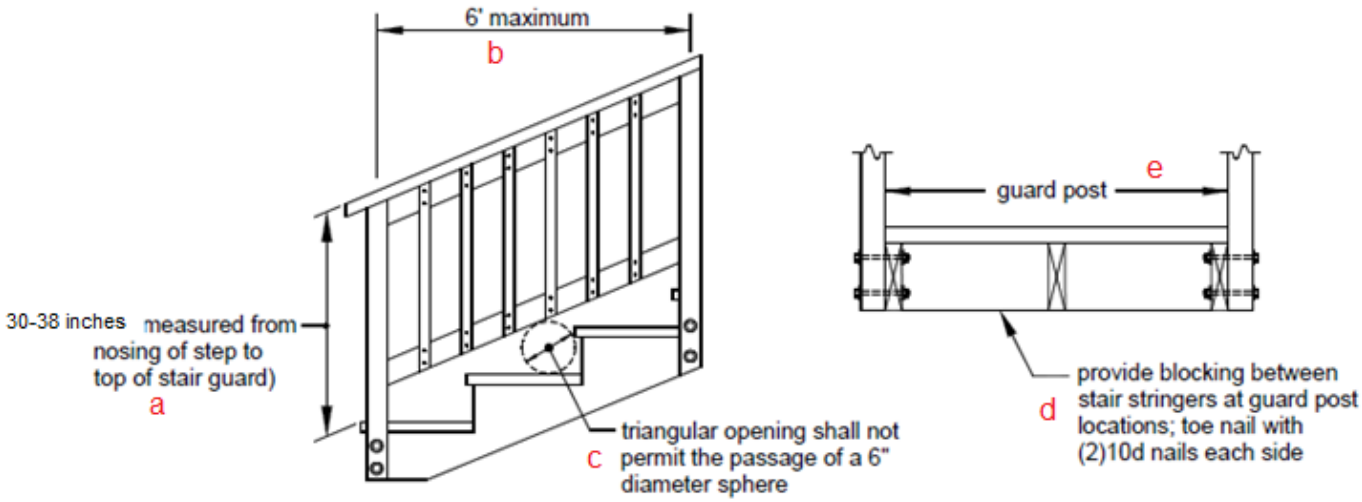

345. Guardrails must be provided on all open sides of stairs consisting of more than ___ risers.
   a. 2
   b. 3
   c. 4
   d. 5

346. The letter a represents _____.
   a. 6’ maximum
   b. 30-38” measured from nosing of step to top of stair guard
   c. triangular opening shall not permit the passage of a 6” diameter sphere
   d. provide blocking between stair stringers and guard post locations

347. The letter b represents _____.
   a. 6’ maximum
   b. 30-38” measured from nosing of step to top of stair guard
   c. triangular opening shall not permit the passage of a 6” diameter sphere
   d. provide blocking between stair stringers and guard post locations

348. The letter c represents _____.
   a. 6’ maximum
   b. 30-38” measured from nosing of step to top of stair guard
   c. triangular opening shall not permit the passage of a 6” diameter sphere
   d. provide blocking between stair stringers and guard post locations

349. The letter d represents _____.
   a. 6’ maximum
   b. 30-38” measured from nosing of step to top of stair guard
   c. triangular opening shall not permit the passage of a 6” diameter sphere
   d. provide blocking between stair stringers and guard post locations

---

Stair handrails. A flight of stairs with more than 3 risers must have at least one handrail that complies with all of the following:

1. The handrail must be located at least 30 inches, but no more than 38 inches above the nosing of the treads – except that a volute, turnout, starting easing, or transition fitting may depart from these dimensions. Measurement must be taken from the nosing to the top of the rail.
2. The handrail must be attached to a stair guardrail or exterior wall acting as a barrier as shown in Figure 33.
3. The handrail and connecting hardware must be decay- and corrosion-resistant.

4. The handrail must have a smooth surface with no sharp corners and must be graspable, as shown in Figure 34. Recessed sections may be shaped from a 2x6 or five-quarter board, as shown there.
5. Handrails must run continuously from a point directly over the lowest riser to a point directly over the highest riser.
6. Handrails may be interrupted by guard posts at a turn in the stair only.

350. A flight of stairs with less than 3 risers must have at least ____handrail.
- a. 1
- b. 2
- c. both a & b
- d. none of the above

351. The handrail must be attached to a _____ acting as a barrier
- a. stair guardrail
- b. exterior wall
- c. both a & b
- d. none of the above

352. The handrail and connecting hardware must be _____ resistant.
- a. decay
- b. corrosion
- c. both a & b
- d. none of the above

353. Handrails may run continuously from a point directly over the lowest riser to a point directly over the highest riser.
- a. true
- b. false

Figure 33
STAIR HANDRAILS

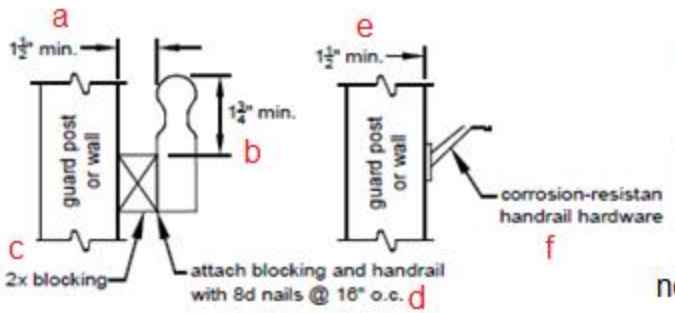

Figure 34
HANDRAIL GRASPABILITY

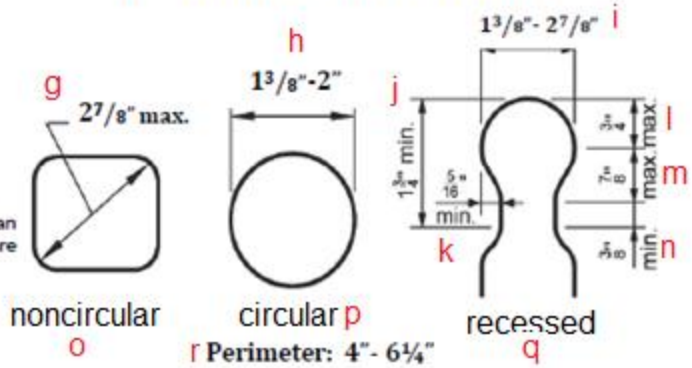

SECTION 15: FRAMING PLAN

A typical framing plan shows a bird's-eye view of the joist and beam layout; the location of the ledger board, diagonal bracing or hold-down devices, posts, and footings; and the type, size, and spacing of the ledger board fasteners. You can use the sample typical deck framing plan shown on the next page in combination with the requirements in this document to complete your deck.

Figure 36
TYPICAL DECK FRAMING PLAN

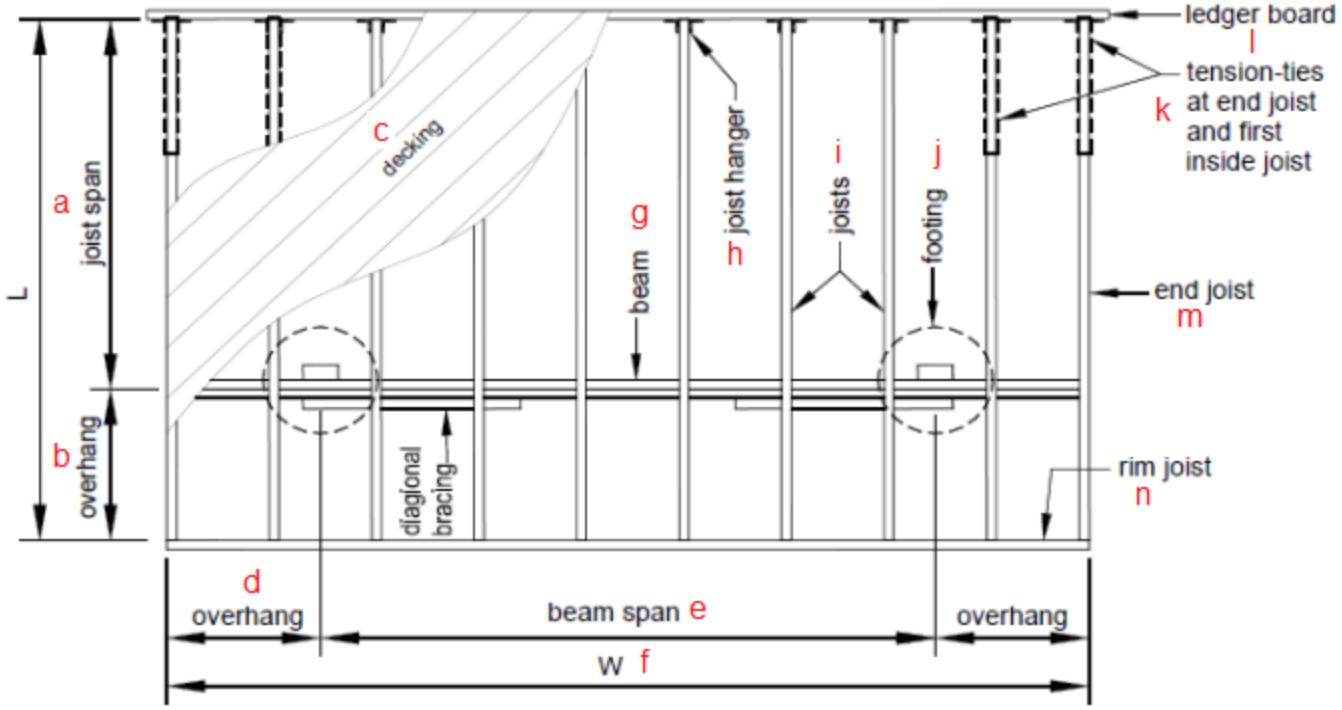

5 100

Decking: ☐ 2x4 ☐ 2x6 ☐ five-quarter board ☐ wood-plastic composite (per ASTM D 7032)
☐ Other decking, evaluation report number:_____

Joists: size: ☐ 2x6 ☐ 2x8 ☐ 2x10 ☐ 2x12 spacing: ☐ 12 in. ☐ 16 in. ☐ 24 in.
joist span dimension: _____ft. - _____in.
overhang: ☐ Yes ☐ No overhang dimension: _____ft. - _____in.
rim joist: ☐ 2x6 ☐ 2x8 ☐ 2x10 ☐ 2x12

Beam(s): number of plies: ☐ 2 ☐ 3 size: ☐ 2x6 ☐ 2x8 ☐ 2x10 ☐ 2x12
overhang: ☐ Yes ☐ No overhang dimension: _____ft. -_____in.

Posts: size: ☐ 4x4 ☐ 4x6 ☐ 6x6 height: _____ft. - _____in.

Footings: size:_____in. ☐ square ☐ round thickness: _____in.

Ledger: ledger board size: ☐ 2x8 ☐ 2x10 ☐ 2x12 ☐ Not applicable (free-standing deck)
fastener: ☐ Through bolt ☐ Lag screw ☐ Wood screw
☐ Expansion anchor ☐ Adhesive anchor

Lateral support: ☐ Tension-tie ☐ Diagonal bracing, size: ☐ 2x
(not permitted for free-standing deck)

Deck size: L=_____ft. - _____in. W=_____ft. - _____in.

SECTION 8.Chapters SPS 320 to 325 Appendix C is created to read:

Chapters SPS 320 –325 Appendix C

Supplemental Deck Features and Reference Information

CONTENTS

1.Wood preservatives for ground contact.
2. Specifications for fasteners.
3. Sources of design values.
4. Joist spans for alternate wood species.
5. Framing around a chimney or bay window.
6. Attachment of ledger boards to metal-plate-connected wood floor trusses.

1. Wood preservatives for ground contact. The following Table lists common pressure-preservative treatments and retention levels, in pounds per cubic foot, for sawn lumber in ground contact–based on the American Wood Protection Association's *Book of Standards*.

Table C–1
PRESERVATIVE TREATMENTS AND RETENTION LEVELS FOR GROUND CONTACT (IN POUNDS PER CUBIC FOOT)

Species	ACQ-B	ACQ-C	ACQ-D	CA-B	CuN-W
Southern Pine	0.40	0.40	0.40	0.21	0.11
Douglas Fir-Larch	0.40	0.40	NR	0.21	0.11
Hem-Fir	0.40	0.40	0.40	0.21	0.11
Ponderosa Pine	0.40	0.40	0.40	0.21	0.11
Red Pine	0.40	0.40	0.40	0.21	0.11
Spruce-Pine-Fir	NR[1]	0.40	NR	NR	NR
Redwood	NR	NR	NR	NR	NR

[1]NR = treatment not recommended.

2. Sources of design values. The sources of the design values in Appendix B are as follows:

• Table 1 – Minimum footing sizes: The Building Inspectors Association of Southeast Wisconsin, December 2014.

• Table 2 – Maximum post heights: *Typical Deck Details, Based on the 2009 International Residential Code*, Fairfax County, Virginia, July 2013.

• Tables 3A and 3B – Maximum beam spans: *Design for Code Acceptance 6,* American Wood Council, May 2013.

• Table 4 – Maximum joist spans: *Design for Code Acceptance 6* (DCA 6), American Wood Council, May 2013; except for the 2x6 values, which are from the Building Inspectors Association of Southeast Wisconsin, December 2014.

• Table 5 – Minimum joist-hanger download capacity: *Design for Code Acceptance 6,* American Wood Council, May 2013; except for the 2x6 values, which are repeated from the 2x8 values.

• Table 6 – Ledger-board-fastener spacing: *Design for Code Acceptance 6,* American Wood Council, May 2013.

• Figure 30 – Stringer span length, and Table 7 – Minimum tread sizes: *Design for Code Acceptance 6,* American Wood Council, May 2013.

• Table C–2 – Maximum joist spans for redwood, western cedars, ponderosa pine, and red pine: *Design for Code Acceptance 6,* American Wood Council, May 2013; except for the 2x6 values, which are from the Building Inspectors Association of Southeast Wisconsin, December 2014.

• Table C–3 – Trimmer joist download capacity: *Design for Code Acceptance 6,* American Wood Council, May 2013.

3. Joist spans for alternate wood species. The following Table lists maximum joist-span lengths for redwood, western cedars, ponderosa pine, and red pine.

Table C–2
MAXIMUM JOIST-SPAN LENGTH[1] FOR REDWOOD, WESTERN CEDARS, PONDEROSA PINE[2], AND RED PINE[2]

Joist Spacing (on center)	Joist Size	Without Overhang	With Overhangs
12"	2x6	8'-5"	7'-3"
	2x8	11'-8"	8'-6"
	2x10	14'-11"	12'-3"
	2x12	17'-5"	16'-5"
16"	2x6	7'-8"	7'-3"
	2x8	10'-7"	8'-6"
	2x10	13'-0"	12'-3"
	2x12	15'-1"	15'-1"
24"	2x6	6'-7"	6'-7"
	2x8	8'-8"	8'-6"
	2x10	10'-7"	10'-7"
	2x12	12'-4"	12'-4"

1. Spans are based on 40 psf live load, 10 psf dead load, normal loading duration, wet service conditions and deflections of Δ=L/360 for main span and L/180 for overhang with a 220-lb. point load.
2. Design values based on northern species with no incising assumed.

4. Alternate beam and joist spans. The table on the following two pages lists alternate beam and joist spans and corresponding footing sizes from the Southeast Wisconsin Building Inspectors Association that can be used instead of the values in Appendix B.

Beam and Footing Sizes with Overhangs

Based on No. 2 or better Southern Pine, Douglas Fir-Larch[2], and Ponderosa Pine

| Joist Length (JL)[1] | | Post Spacing (Measured Center to Center) | | |

Beam and Footing Sizes with Overhangs

Based on No. 2 or better Southern Pine, Douglas Fir-Larch[2], and Ponderosa Pine

| Joist Length (JL)[1] | | Post Spacing (Measured Center to Center) | | |

355. Framing around a chimney or bay window. _____ used to attach the hanger to the ledger must fully extend through the ledger into the 2-inch nominal lumber band joist (1½" actual) or the EWP rim board.
a. Bolts
b. Lag screws
c. Nails
d. both a & b

356. All members at a chimney or bay window must be framed in accordance with Figure C–1. Headers may span a maximum of ____ feet.
a. 5
b. 6
c. 7
d. 8

Figure C–1
DETAIL FOR FRAMING AROUND A CHIMNEY OR BAY WINDOW

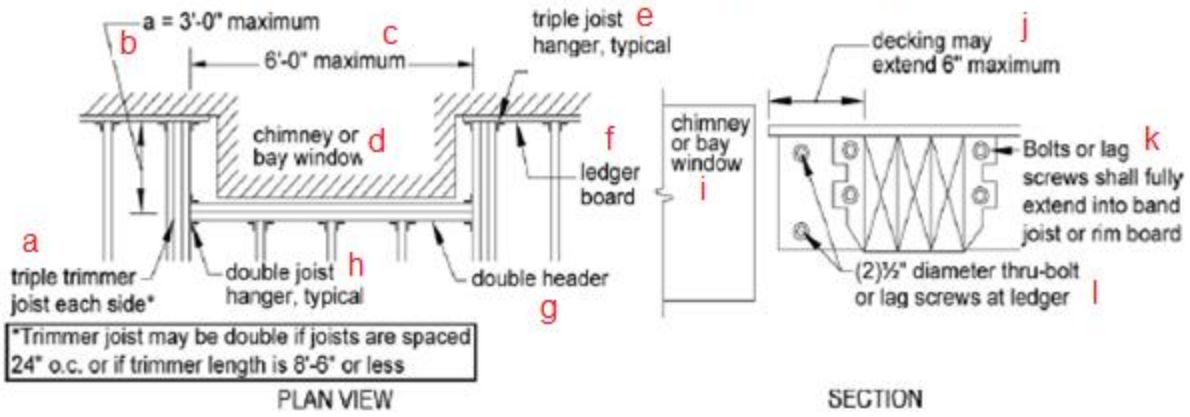

Table C–3
TRIMMER JOIST HANGER DOWNLOAD CAPACITY

Joist Size	Minimum Capacity, lbs
2x8	1050
2x10	1380
2x12	1500

357. The letter b represents _____.
a. 3’ maximum
b. 6’ maximum
c. decking may extend 6” maximum
d. double header

358. The letter c represents _____.
a. 3’ maximum
b. 6’ maximum
c. decking may extend 6” maximum
d. double header

359. The letter j represents _____.
a. 3’ maximum
b. 6’ maximum
c. decking may extend 6” maximum
d. double header

360. The letter g represents _____.

a. 3’ maximum
b. 6’ maximum
c. decking may extend 6” maximum
d. double header

---

6. Attachment of ledger boards to metal-plate-connected wood floor trusses. The research report on the following pages shows acceptable methods for attaching a ledger board to a metal-plate-connected wood-floor-truss system.

To obtain your Continuing Education Credits follow the below instructions.

1. Print out first.
2. Fill in all fields applicable. **Fee $100**
3. Include your certification or license number if applicable.
4. We’ll take care of crediting with the state and sending you back a verification form.

Send by mail

1. **The answer sheet and this page only.**
2. Fill out this form below completely.
3. Applicable fees by check payable to our business name: **GaryKlinka.com**
4. Mail to: **GaryKlinka.com** at 1316 Cardinal Circle, Neenah, WI 54956.

Live Support at 920-381-6714 or tmklinka@hotmail.com

----------Educational Course Attendance Verification Form ----------

Attendee’s Name_____ Date_____

Address_____

Credential Number_____ Phone#_____

Course Title and Name New Deck Code Quiz

List each credential held by attendee_____

_____ Credited Hours 12 hrs Fee:$100

Email address_____ Fax#_____

To be completed by GaryKlinka.com

Course Password_____ Course ID# 17660

Attendee passed the course with a greater than 70% score on Date_____

Instructor Signature_____

New Deck Code Quiz

1	a	b	c	d	41	a	b	c	d	81	a	b	c	d
2	a	b	c	d	42	a	b	c	d	82	a	b	c	d
3	a	b	c	d	43	a	b	c	d	83	a	b	c	d
4	a	b	c	d	44	a	b	c	d	84	a	b	c	d
5	a	b	c	d	45	a	b	c	d	85	a	b	c	d
6	a	b	c	d	46	a	b	c	d	86	a	b	c	d
7	a	b	c	d	47	a	b	c	d	87	a	b	c	d
8	a	b	c	d	48	a	b	c	d	88	a	b	c	d
9	a	b	c	d	49	a	b	c	d	89	a	b	c	d
10	a	b	c	d	50	a	b	c	d	90	a	b	c	d
11	a	b	c	d	51	a	b	c	d	91	a	b	c	d
12	a	b	c	d	52	a	b	c	d	92	a	b	c	d
13	a	b	c	d	53	a	b	c	d	93	a	b	c	d
14	a	b	c	d	54	a	b	c	d	94	a	b	c	d
15	a	b	c	d	55	a	b	c	d	95	a	b	c	d
16	a	b	c	d	56	a	b	c	d	96	a	b	c	d
17	a	b	c	d	57	a	b	c	d	97	a	b	c	d
18	a	b	c	d	58	a	b	c	d	98	a	b	c	d
19	a	b	c	d	59	a	b	c	d	99	a	b	c	d
20	a	b	c	d	60	a	b	c	d	100	a	b	c	d
21	a	b	c	d	61	a	b	c	d	101	a	b	c	d
22	a	b	c	d	62	a	b	c	d	102	a	b	c	d
23	a	b	c	d	63	a	b	c	d	103	a	b	c	d
24	a	b	c	d	64	a	b	c	d	104	a	b	c	d
25	a	b	c	d	65	a	b	c	d	105	a	b	c	d
26	a	b	c	d	66	a	b	c	d	106	a	b	c	d
27	a	b	c	d	67	a	b	c	d	107	a	b	c	d
28	a	b	c	d	68	a	b	c	d	108	a	b	c	d
29	a	b	c	d	69	a	b	c	d	109	a	b	c	d
30	a	b	c	d	70	a	b	c	d	110	a	b	c	d
31	a	b	c	d	71	a	b	c	d	111	a	b	c	d
32	a	b	c	d	72	a	b	c	d	112	a	b	c	d
33	a	b	c	d	73	a	b	c	d	113	a	b	c	d
34	a	b	c	d	74	a	b	c	d	114	a	b	c	d
35	a	b	c	d	75	a	b	c	d	115	a	b	c	d
36	a	b	c	d	76	a	b	c	d	116	a	b	c	d
37	a	b	c	d	77	a	b	c	d	117	a	b	c	d
38	a	b	c	d	78	a	b	c	d	118	a	b	c	d
39	a	b	c	d	79	a	b	c	d	119	a	b	c	d
40	a	b	c	d	80	a	b	c	d	120	a	b	c	d

New Deck Code Quiz

121	a	b	c	d	161	a	b	c	d	201	a	b	c	d
122	a	b	c	d	162	a	b	c	d	202	a	b	c	d
123	a	b	c	d	163	a	b	c	d	203	a	b	c	d
124	a	b	c	d	164	a	b	c	d	204	a	b	c	d
125	a	b	c	d	165	a	b	c	d	205	a	b	c	d
126	a	b	c	d	166	a	b	c	d	206	a	b	c	d
127	a	b	c	d	167	a	b	c	d	207	a	b	c	d
128	a	b	c	d	168	a	b	c	d	208	a	b	c	d
129	a	b	c	d	169	a	b	c	d	209	a	b	c	d
130	a	b	c	d	170	a	b	c	d	210	a	b	c	d
131	a	b	c	d	171	a	b	c	d	211	a	b	c	d
132	a	b	c	d	172	a	b	c	d	212	a	b	c	d
133	a	b	c	d	173	a	b	c	d	213	a	b	c	d
134	a	b	c	d	174	a	b	c	d	214	a	b	c	d
135	a	b	c	d	175	a	b	c	d	215	a	b	c	d
136	a	b	c	d	176	a	b	c	d	216	a	b	c	d
137	a	b	c	d	177	a	b	c	d	217	a	b	c	d
138	a	b	c	d	178	a	b	c	d	218	a	b	c	d
139	a	b	c	d	179	a	b	c	d	219	a	b	c	d
140	a	b	c	d	180	a	b	c	d	220	a	b	c	d
141	a	b	c	d	181	a	b	c	d	221	a	b	c	d
142	a	b	c	d	182	a	b	c	d	222	a	b	c	d
143	a	b	c	d	183	a	b	c	d	223	a	b	c	d
144	a	b	c	d	184	a	b	c	d	224	a	b	c	d
145	a	b	c	d	185	a	b	c	d	225	a	b	c	d
146	a	b	c	d	186	a	b	c	d	226	a	b	c	d
147	a	b	c	d	187	a	b	c	d	227	a	b	c	d
148	a	b	c	d	188	a	b	c	d	228	a	b	c	d
149	a	b	c	d	189	a	b	c	d	229	a	b	c	d
150	a	b	c	d	190	a	b	c	d	230	a	b	c	d
151	a	b	c	d	191	a	b	c	d	231	a	b	c	d
152	a	b	c	d	192	a	b	c	d	232	a	b	c	d
153	a	b	c	d	193	a	b	c	d	233	a	b	c	d
154	a	b	c	d	194	a	b	c	d	234	a	b	c	d
155	a	b	c	d	195	a	b	c	d	235	a	b	c	d
156	a	b	c	d	196	a	b	c	d	236	a	b	c	d
157	a	b	c	d	197	a	b	c	d	237	a	b	c	d
158	a	b	c	d	198	a	b	c	d	238	a	b	c	d
159	a	b	c	d	199	a	b	c	d	239	a	b	c	d
160	a	b	c	d	200	a	b	c	d	240	a	b	c	d

New Deck Code Quiz

241	a	b	c	d	281	a	b	c	d	321	a	b	c	d
242	a	b	c	d	282	a	b	c	d	322	a	b	c	d
243	a	b	c	d	283	a	b	c	d	323	a	b	c	d
244	a	b	c	d	284	a	b	c	d	324	a	b	c	d
245	a	b	c	d	285	a	b	c	d	325	a	b	c	d
246	a	b	c	d	286	a	b	c	d	326	a	b	c	d
247	a	b	c	d	287	a	b	c	d	327	a	b	c	d
248	a	b	c	d	288	a	b	c	d	328	a	b	c	d
249	a	b	c	d	289	a	b	c	d	329	a	b	c	d
250	a	b	c	d	290	a	b	c	d	330	a	b	c	d
251	a	b	c	d	291	a	b	c	d	331	a	b	c	d
252	a	b	c	d	292	a	b	c	d	332	a	b	c	d
253	a	b	c	d	293	a	b	c	d	333	a	b	c	d
254	a	b	c	d	294	a	b	c	d	334	a	b	c	d
255	a	b	c	d	295	a	b	c	d	335	a	b	c	d
256	a	b	c	d	296	a	b	c	d	336	a	b	c	d
257	a	b	c	d	297	a	b	c	d	337	a	b	c	d
258	a	b	c	d	298	a	b	c	d	338	a	b	c	d
259	a	b	c	d	299	a	b	c	d	339	a	b	c	d
260	a	b	c	d	300	a	b	c	d	340	a	b	c	d
261	a	b	c	d	301	a	b	c	d	341	a	b	c	d
262	a	b	c	d	302	a	b	c	d	342	a	b	c	d
263	a	b	c	d	303	a	b	c	d	343	a	b	c	d
264	a	b	c	d	304	a	b	c	d	344	a	b	c	d
265	a	b	c	d	305	a	b	c	d	345	a	b	c	d
266	a	b	c	d	306	a	b	c	d	346	a	b	c	d
267	a	b	c	d	307	a	b	c	d	347	a	b	c	d
268	a	b	c	d	308	a	b	c	d	348	a	b	c	d
269	a	b	c	d	309	a	b	c	d	349	a	b	c	d
270	a	b	c	d	310	a	b	c	d	350	a	b	c	d
271	a	b	c	d	311	a	b	c	d	351	a	b	c	d
272	a	b	c	d	312	a	b	c	d	352	a	b	c	d
273	a	b	c	d	313	a	b	c	d	353	a	b	c	d
274	a	b	c	d	314	a	b	c	d	354	a	b	c	d
275	a	b	c	d	315	a	b	c	d	355	a	b	c	d
276	a	b	c	d	316	a	b	c	d	356	a	b	c	d
277	a	b	c	d	317	a	b	c	d	357	a	b	c	d
278	a	b	c	d	318	a	b	c	d	358	a	b	c	d
279	a	b	c	d	319	a	b	c	d	359	a	b	c	d
280	a	b	c	d	320	a	b	c	d	360	a	b	c	d